JHK

基恒康

JHK-DOOR

DOOR

浙江基恒康门业有限公司

ZHEJIANG JIHENGKANG(JHK) DOOR INDUSTRY CO.,LTD

浙江基恒康门业有限公司

ZHEJIANG JIHENGKANG(JHK) DOOR INDUSTRY CO.,LTD

地址：中国浙江省金华市婺城新区临江工业园区星康路99号

Add：No.99 Xingkang Road, Linjiang Industry Park, Jinhua, Zhejiang Province, China

Mobile：+86-156-6953-8888

WhatsApp：+86-156-6953-8888

WeChat：JHKGROUP(+86-156-6953-8888)

Zipcode：321025

E-mail：zjjhk@zjjhk.com

Fax：86-579-82220988

Web：www.zjjhk.com

Scan to visit

Corporation Profile



基恒康，全球优质木门供应商。

浙江基恒康门业有限公司成立于2000年，位于浙江省金华市，是国内生产模压门板的龙头企业，现已成为一家集研发、生产、销售、服务于一体的大规模专业木门制造企业，致力于为全球消费者提供绿色环保的模压门板，模压门，板材和定制家具。基恒康现拥有员工200余人，标准化大型厂房生产面积共计60000平方米。

基恒康以"绝不放过任何一个小问题"为准则，执行健全标准的管理体系，贯彻落实可持续发展，严格把控质量问题，现已获得ISO9001：2015质量体系认证，ISO14001：2015环境管理体系认证，TSCA&CARB认证和FSC认证等国际权威证书。层层保障，只为让消费者放心买门，卖门，用门。

基恒康拥有自营出口权，在行业内率先打开模压门板国际市场，以高质量产品取得全球广大建筑商、批发商的青睐与信任，主打模压门板和模压门持续出口至美国，加拿大，法国，日本，韩国等50多个国家和地区，畅销于全球各大市场。

基恒康以管理变革为核心，以技术创新为驱动，持续推进产业升级，加大技术投资，不断引进国际一流自动化生产设备提高产量与质量，基恒康拥有专业的国际市场开发、产品设计团队，具备高度市场敏感度，注重产品研发，保持传统工艺，融入现代元素，引领产业变革，不断提高消费者生活品质，提供一次多选，一站购门的集中供应，致力于让每个家庭拥有更好的门。

基恒康始终以"优质绿色的原料，优质创新的设计，优质高效的生产，优质专业的服务"即"四优标准"为企业发展理念，一切以客户为出发点，提供具有市场竞争力的价格，为客户创造价值，同时基恒康具备根据客户要求提供量身定制产品的能力，配备专业销售人员，在售前售后不断给予客户解决方案和技术支持。

基恒康以专业为基础，诚信为宗旨，追求卓越，精益求精，20年匠心，专注打造优质木门。

Zhejiang JiHengKang(JHK) Door Industry Co., Ltd, established in 2000, is a large-scale manufacturer of Door Skins, Doors, Wood Boards and Wooden Furniture. JHK employs more than 150 workers, including Production department, QC department, Sales department and R&D department. With the efforts of our entire staff, the products of high quality are widely used in a variety of architecture. JHK has shared the broad masses of the worldwide market for over a decade.

Currently, JHK products are exported to more than 70 countries and regions through America, Europe, Southeast Asia and Middle-East. JHK has always focused on research, development and innovation. To accommodate seasonal demands of the market, JHK develops new products each quarter. In possession of 30,000 m² production area, JHK invested 4 semi-automatic production lines.

As the result of implementing a comprehensive internal management system, JHK has attained the latest ISO9001: 2015 quality management system certification as well as the ISO14001:2015 environmental management system certification. To meet the ever-increasing customer demands, JHK uses high standard raw material with the certificates of TSCA&CARB and FSC. JHK strives to provide the top-quality products with reasonable prices, efficient production time and the most professional service. JHK always focuses on customers' needs and therefore provides tailored products and approaches clients actively to solve any problems they have.

With the variety of top-quality products JHK offers, we are confident that we will become your ideal partner. Your satisfaction is our priority.

CATALOGUE

1. Company Profile ····· P2
2. Test Report and Certificates ····· P7
3. Model &Veneer Options &Painting Options ····· P13
4. White Primer Door ····· P24
5. Flush Door ····· P33
6. Fireproof Door ····· P45
7. Veneer Door ····· P51
8. Craftsman Veneer Door ····· P59
9. Shaker Door ····· P63
10. Solid Wood Door ····· P69
11. Glass Door ····· P83
12. PVC Door ····· P97
13. Melamine Door ····· P107
14. WPC Door ····· P117
15. ABS Door ····· P123
16. Fiberglass Door ····· P131
17. Louver Door ····· P137
18. Bifold Door ····· P141
19. Sliding Door ····· P151
20. Barn Door ····· P159
21. Package ····· P170
22. Door Frame and Accessories ····· P172

JHK
Development History

2000
Birth
JHK was formally established with a production area of 5000㎡, mainly producing molded door skin.

2002
JHK introduced cold press machine and started developing and producing molded doors.






2006
JHK new factory laid a foundation and expanded its area to 30,000m².

2008
JHK second manufacturing base was put into production, and the annual output of door skin reached 1 million. Our product was exported to more than 30 countries and regions.



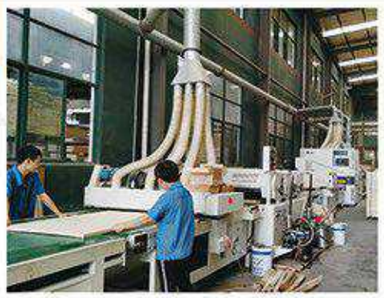

2010
Industrial upgrading
Automated production line was put into use

2013
JHK has more than 200 sets of moulds to meet diversified demands of customer.





2017
Branch was established to expand more market share.

2018
Annual capacity to 750,000 sets of doors, 2 million pieces of door skins, becoming hot sale products for more than 70 countries and regions






2019
Production area will be expanded to 60,000m² to further develop Industry 4.0.

Future
To become the top door industry compamy in China and cover our markets to the whole world.

Purchasing Process

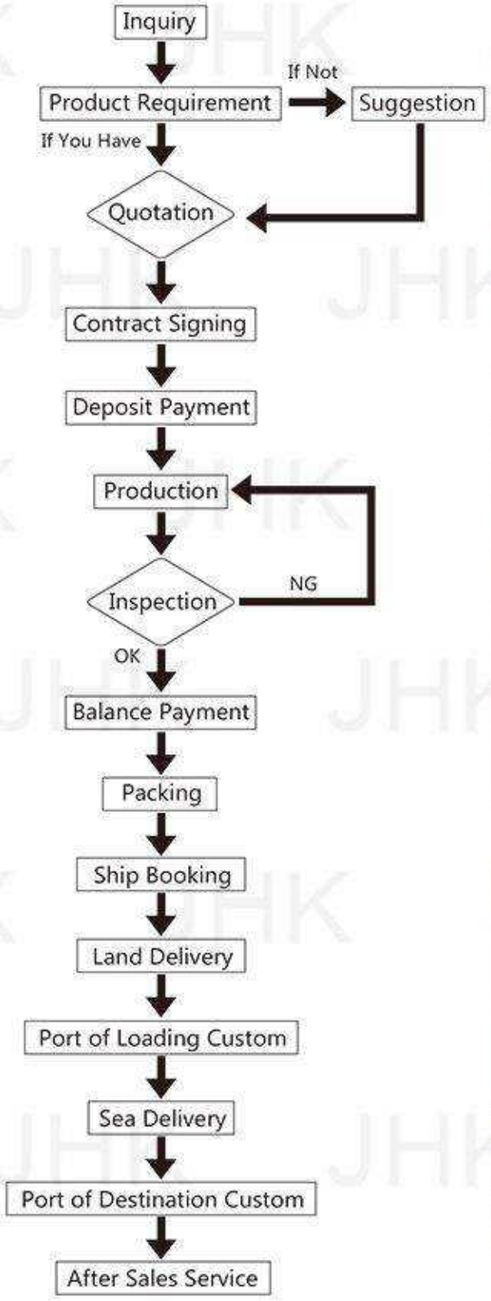









20000㎡ standard workshop

60000 pcs door per month

Carpentry Workshop



5000㎡ standard workshop

240000 pcs door skin per month

Mold Workshop



5000㎡ standard workshop

20 containers per month

Board Workshop



5000㎡ adequate storage space

Warehouse



Strict quality testing Responsible for quality

Quality Control



Raw material control Control of moisture

Drying Room



Reliable salesperson Professional service

Sales Department



Free drawing Customized product

Research & Development

基恒康向大师致敬！
JHK Salutes to the Masters!

剪一段时光来雕刻岁月



Purse excellence, and success will follow.

JHK 基恒康

Certificate of Honor

CERTIFICATE

FSC www.fsc.org FSC® A000504
The mark of responsible forestry

Certificate Code: SA-COC-004505
License Code: FSC-C122570

MAIN ADDRESS

Company Name: ZHEJIANG JIHENGKANG(JHK)DOOR INDUSTRY CO.,LTD
Local Name: 浙江基恒康门业有限公司
Address: NO.99 XINGKANG ROAD,LINJIANG INDUSTRIAL PARK,JINHUA ,ZHEJIANG,CHINA
Zipcode: 321000
Website: http://www.zjjhk.com
http://www.doorskin-jhk.com

CONTACT(S)

Bei Zhou: +86-579-82756299
zjjhk@zjjhk.com

CERTIFICATE DATA

Status: Valid
First Issue Date: 2018-09-16
Last Issue Date: 2018-09-16
Expiry Date: 2023-09-15
Standard: FSC-STD-40-004 V2-1

PRODUCTS

Product Type	Trade Name	Species	Primary Activity	Main Output Category
W9 Engineered Wood Products W9.1 Finger Jointed wood		Betula spp.;Hevea brasiliensis;Pinus spp.;Populus spp.	Secondary Processor	FSC 100%
W19 Other Wood Products n.e.c.		Betula pendula;Hevea brasiliensis;Khaya spp.; Pinus massoniana;Pinus sylvestris;Populus spp.; Schima wallichii(DC.) Korth.	Secondary Processor	FSC 100%
W11 Wood for Construction W11.1 Doors and Door Frames		Betula pendula;Betula spp.;Hevea brasiliensis;Khaya spp.; Pinus massoniana;Pinus spp.;Pinus sylvestris;Populus spp.; Schima wallichii(DC.)Korth.	Secondary Processor	FSC 100%

Certificates



TUV-Factoty report



BV



SGS




ISO9000



ISO14000



CE

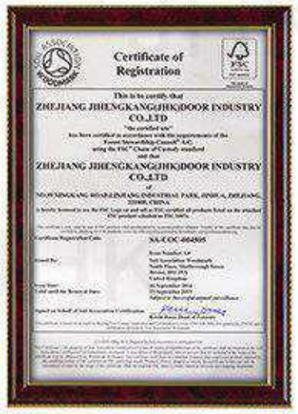

FSC



TSCA&CARB



Fire-Proof Test

Honors























General	标准 Limit	测试结果 Result
密度 Density	≥810Kg/M³	820
密度偏差 Density Deviation	±7%	5.6
含水率 Moisture	4.5~7%	5.53
吸水厚度膨胀率 Swelling After 24h in Water	≤35%	21.5
内结合强度 Internal Bond strength	≥1.2Mpa	1.46
静曲强度 Modulus of Rupture	≥30Mpa	45.54
弹性模量 Modulus of Elasticity	≥2800Mpa	3136
厚度偏差 Thickness Tolerance	+0.15/-0.05mm	2.81
尺寸公差 Size Tolerance	+4/-0mm	2100*830
曲度 Curvature	≤0.5%	0.3
甲醛释放量 Formaldehyde Emission	≤30mg/100g	28.3

Carb 2	标准 Limit	测试结果 Result
密度 Density	≥810Kg/M³	820
密度偏差 Density Deviation	±7%	5.6
含水率 Moisture	4.5~7%	5.53
吸水厚度膨胀率 Swelling After 24h in Water	≤35%	21.5
内结合强度 Internal Bond strength	≥1.2Mpa	1.46
静曲强度 Modulus of Rupture	≥30Mpa	45.54
弹性模量 Modulus of Elasticity	≥2800Mpa	3136
厚度偏差 Thickness Tolerance	+0.15/-0.05mm	2.81
尺寸公差 Size Tolerance	+4/-0mm	2100*830
曲度 Curvature	≤0.5%	0.3
甲醛释放量 Formaldehyde Emission	≤6mg/100g	5.8

SGS CMA 2014090938Z CNAS 中国认可 检测 TESTING CNAS L0599

分类		限值（g/Kg）
溶剂型胶粘剂	氯丁橡胶胶粘剂	≤0.50
	SBS胶粘剂	≤0.50
	聚氨酯类胶粘剂	-
	其他胶粘剂	-
水基型胶粘剂	缩甲醛类胶粘剂	≤1.0
	聚乙酸乙烯酯胶粘剂	≤1.0
	橡胶类胶粘剂	≤1.0
	聚氨酯类胶粘剂	-
	其他胶粘剂	≤1.0

Category		Limit(g/Kg)
Solvent-based adhesive	Chloroprene rubber type adhesive	≤0.50
	SBS type adhesive	≤0.50
	Polyurethane type adhesive	
	Others	
Water-based adhesive	Methylal resin type adhesive	≤1.0
	Poly(vinyl acetate)adhesive	≤1.0
	Rubber type adhesive	≤1.0
	Polyurethane type adhesive	
	Others	≤1.0

分类		限值（g/L）
溶剂型胶粘剂	氯丁橡胶胶粘剂	≤700
	SBS胶粘剂	≤700
	聚氨酯类胶粘剂	≤700
	其他胶粘剂	≤700
水基型胶粘剂	缩甲醛类胶粘剂	≤350
	聚乙酸乙烯酯胶粘剂	≤110
	橡胶类胶粘剂	≤250
	聚氨酯类胶粘剂	≤100
	其他胶粘剂	≤350
本体型胶粘剂		≤100

Category		Limit(g/L)
Solvent-based adhesive	Chloroprene rubber type adhesive	≤ 700
	SBS type adhesive	≤ 700
	Polyurethane type adhesive	≤ 700
	Others	≤ 700
Water-based adhesive	Methylal resin type adhesive	≤ 350
	Poly(vinyl acetate)adhesive	≤ 110
	Rubber type adhesive	≤ 250
	Polyurethane type adhesive	≤ 100
	Others	≤ 350
Body-based adhesive		≤ 100

分类		苯的限值（g/Kg）	甲苯+二甲苯的限值（g/Kg）
溶剂型胶粘剂	氯丁橡胶胶粘剂	≤5.0	≤200
	SBS胶粘剂		≤150
	聚氨酯类胶粘剂		≤150
	其他胶粘剂		≤150
水基型胶粘剂	缩甲醛类胶粘剂	≤0.20	≤10
	聚乙酸乙烯酯胶粘剂		
	橡胶类胶粘剂		
	聚氨酯类胶粘剂		
	其他胶粘剂		

Category		Limit of Benzene(g/Kg)	Limit of Toluene+Xylene(g/Kg)
Solvent-based adhesive	Chloroprene rubber type adhesive	≤5.0	≤200
	SBS type adhesive		≤150
	Polyurethane type adhesive		≤150
	Others		≤150
Water-based adhesive	Methylal resin type adhesive	≤0.20	≤10
	Poly(vinyl acetate)adhesive		
	Rubber type adhesive		
	Polyurethane type adhesive		
	Others		

金华出入境检验检疫局综合技术服务中心

JINHUA ENTRY-EXIT INSPECTION & QUARANTINE BUREAU
COMPREHENSIVE TECHNOLOGY SERVICE CENTRE
中国浙江金华市金东区宋濂路1000号 邮编：321015
1000 Songlian Road Jindong District Jinhua Zhejiang ,China Tel:(86)579-82185070 Fax: 82185071

检 测 报 告

Test Report

报验编号：Inspection Code 056322019000188
实验室编号：Laboratory Code JH20190028
品名：Commodity 模压门板 (Model Door Skin)
报告日期：Date of Report 2019-01-23
委托单位：Commission Unit 浙江基恒康门业有限公司
收样日期：Receiving Date 2019-01-16
单位地址：Company Address 浙江省金华市婺城区临江工业园基康路 99号
规格：Discription MDF 5×15cm
样品状态：Sample Status

检测结果（Test Result）：

检测项目 Inspection Item	结果数据 Result Data	单位 Unit	检测方法 Test Method
甲醛释放量（干燥器法）Formaldehyde Emission(Desiccator Method)	0.26	mg/L	GB/T 17657-2013

****
以下空白 End of the list


授权签字人：
AUTHORIZED SIGNATURE

报告结束 End of the report

备注：1.样品品名和规格等信息由委托方提供并负责。2.以上检测结果仅对来样负责。3.我们已尽所知和最大能力实施上述检验（鉴定，上述内容仅反映当时当地条件下检验/鉴定情况，不能因我们签发本报告/证书而免除卖方或其它方面根据合同和法律所承担的产品责任和其它责任。4.未经书面许可，本报告/证书不得部分复制。Remark: 1. Sample description and specification are provided by applicant .2.We are only responsible for the sample delivered by the applicant.3.All inspections or survey are carried out conscientiously to the best of our knowledge and ability, and represent our findings at dates and places of attendance. This report or certificate does not in any respect absolve the seller and other related parties from his contractual and legal obligations especially when product quality is concerned.4.Without written approval of us, this report or certificate shall not be reproduced except in full.


本页结束 第1页 共1页

Type One: Flush Door Design JHK-F

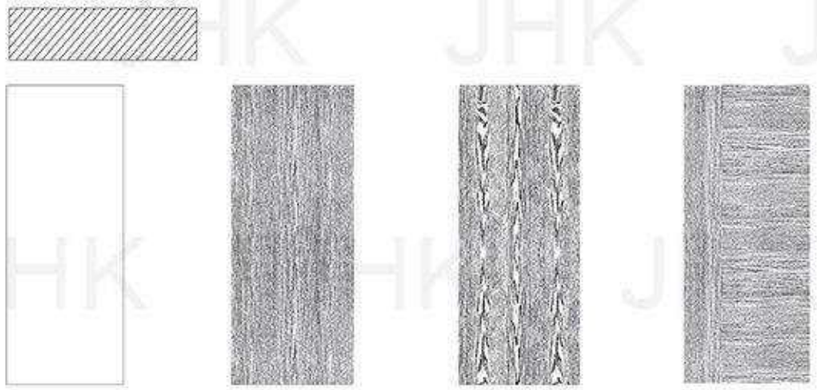

JHK-F01 JHK-F02 JHK-F03 JHK-F04

Type Two: Raised Door Design JHK-M







JHK-M01 JHK-M02



JHK-M03 JHK-M04 JHK-M10 JHK-M11


Type Three: 12mm Depth Door Design JHK-S








JHK-S01 JHK-S02 JHK-S03 JHK-S04

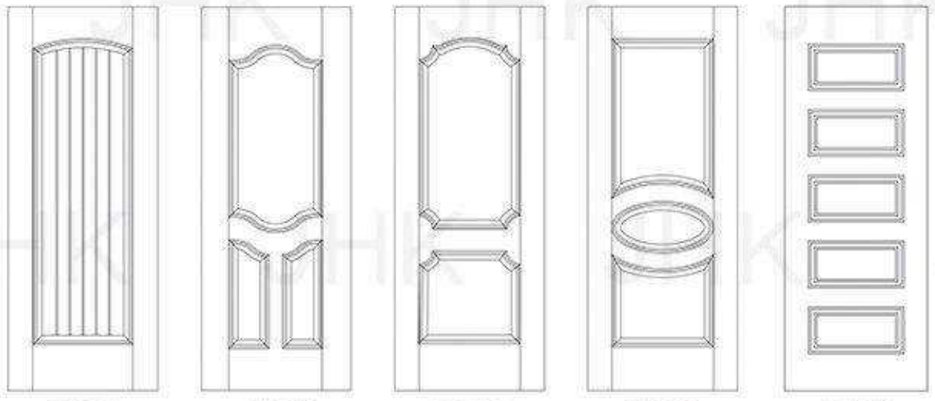


JHK-S05 JHK-S06 JHK-S07 JHK-S08 JHK-S09

Type Four: 8mm Depth Door Design JHK-0







JHK-000 JHK-001 JHK-002 JHK-003 JHK-004 JHK-004P

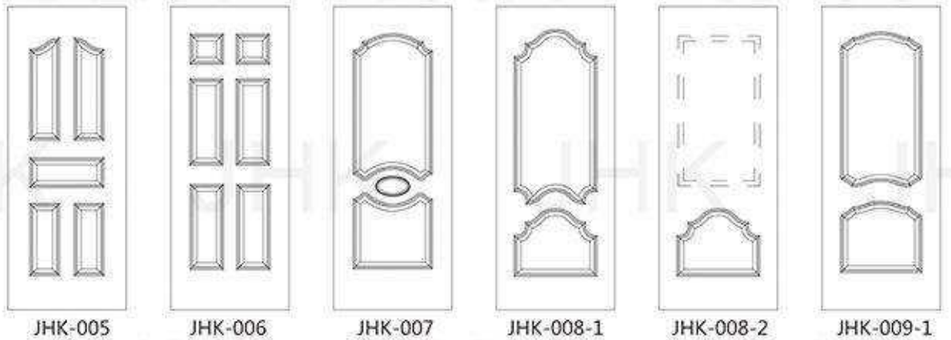

JHK-005 JHK-006 JHK-007 JHK-008-1 JHK-008-2 JHK-009-1

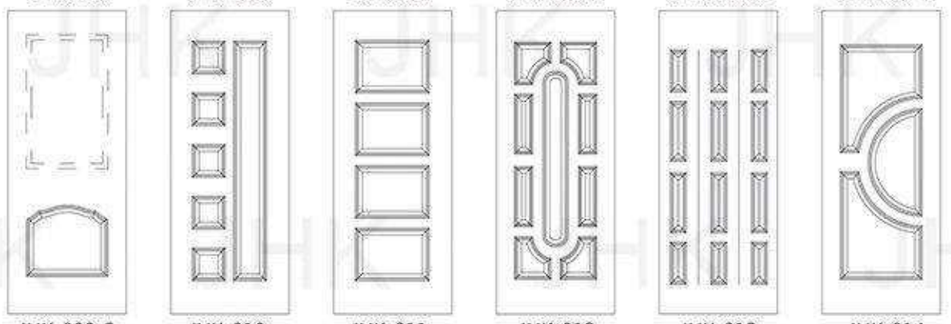


JHK-009-2 JHK-010 JHK-011 JHK-012 JHK-013 JHK-014

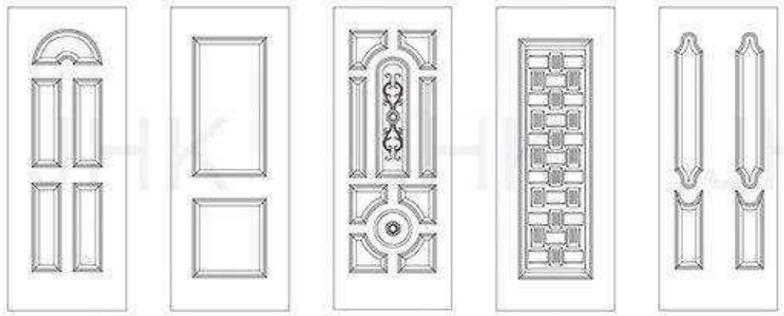


JHK-015 JHK-017 JHK-018 JHK-019 JHK-020


Type Five:Glass Door Design JHK-G

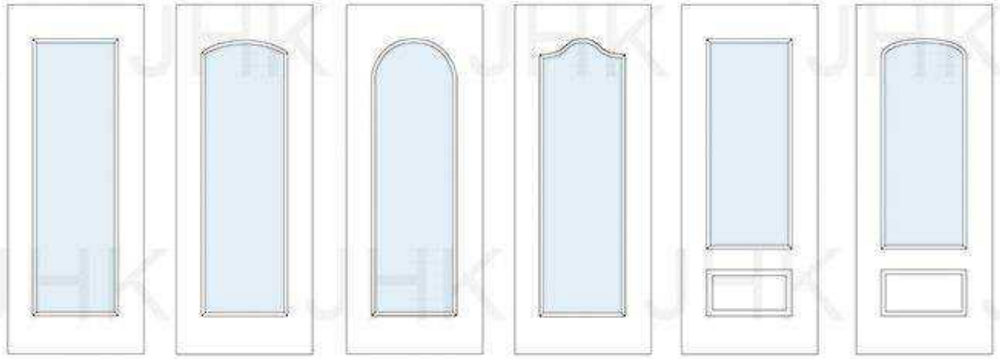

JHK-G01 JHK-G02 JHK-G03 JHK-G04 JHK-G05 JHK-G06

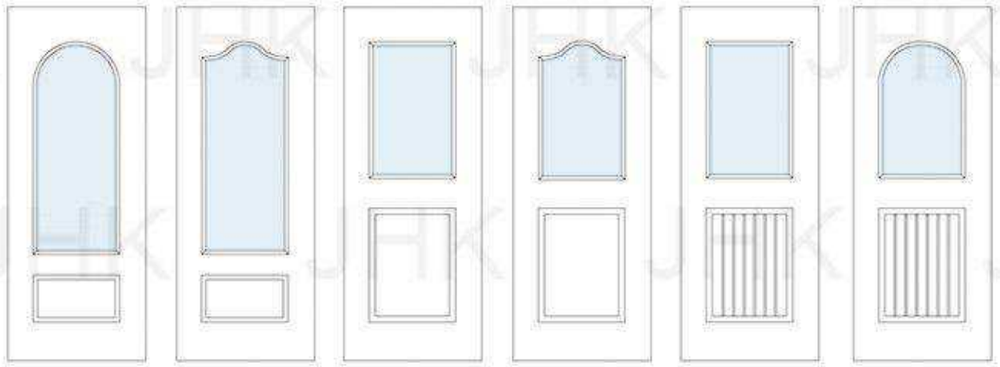


JHK-G07 JHK-G08 JHK-G09 JHK-G10 JHK-G11 JHK-G12

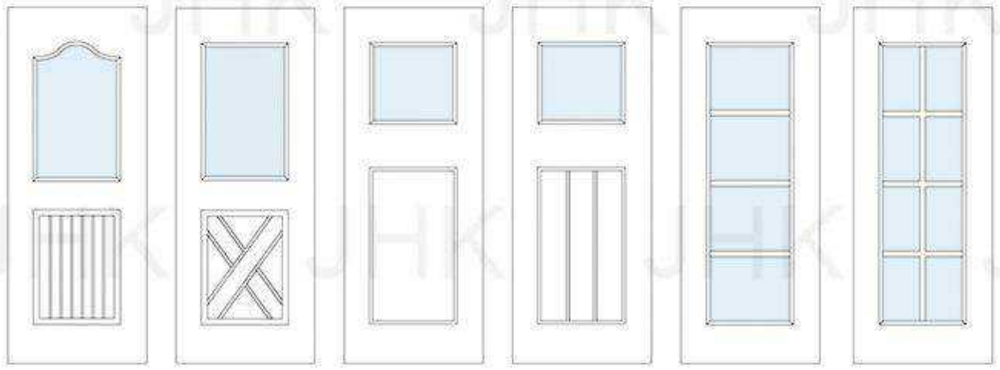


JHK-G13 JHK-G14 JHK-G15 JHK-G16 JHK-G17 JHK-G18


Type Five:Glass Door Design JHK-G

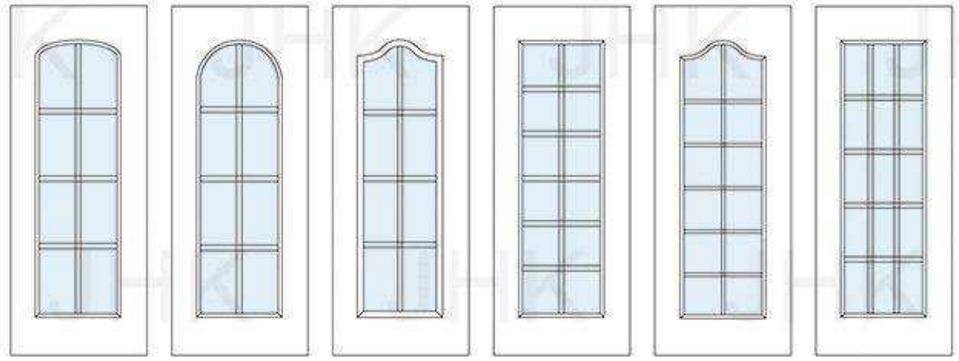

JHK-G19 JHK-G20 JHK-G21 JHK-G22 JHK-G23 JHK-G24

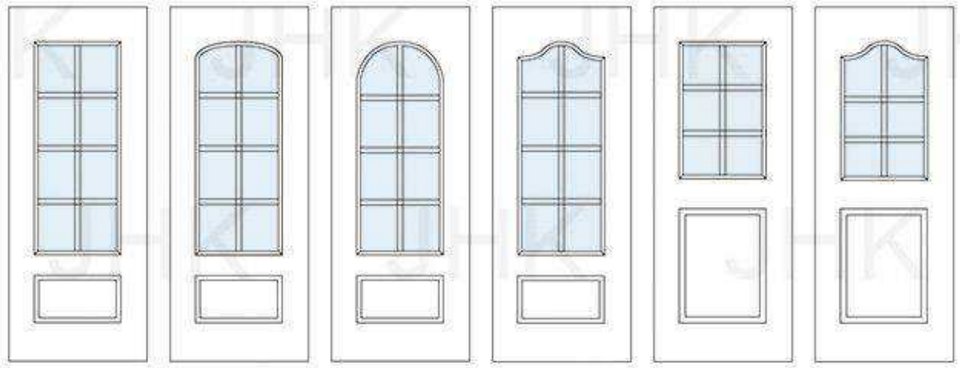


JHK-G25 JHK-G26 JHK-G27 JHK-G28 JHK-G29 JHK-G30

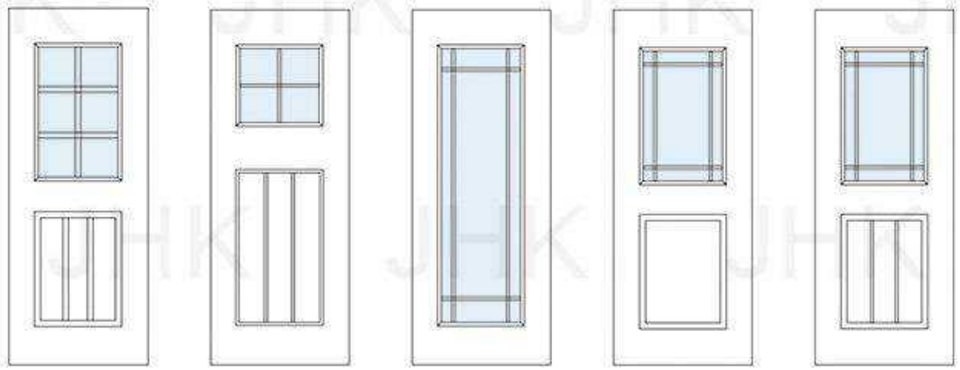

JHK-G31 JHK-G32 JHK-G33 JHK-G34 JHK-G35

Type Six: Shaker Style Door Design

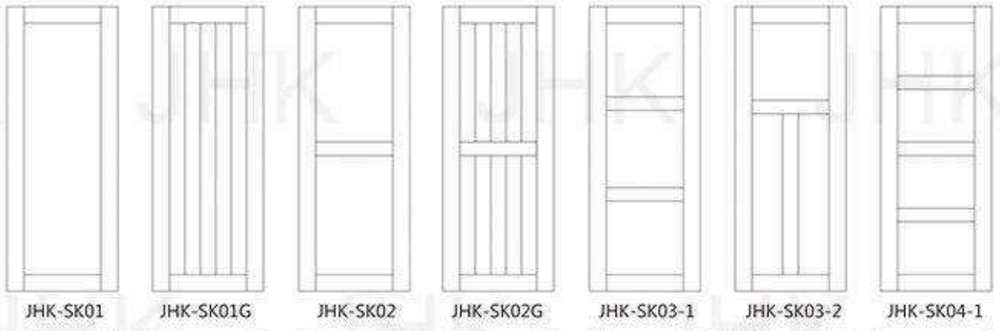








Type Seven: Bi-Fold Door Design

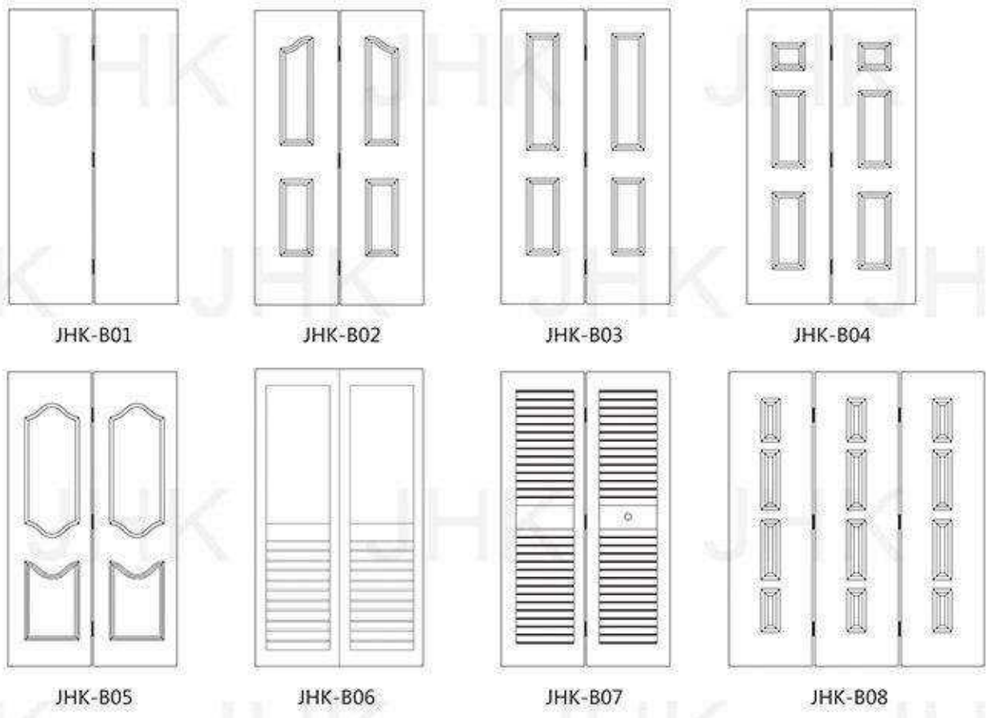

Wood Veneer Option



N-Red Oak
天然红橡



N-Ash
天然水曲柳



N-Maple
天然枫木



N-Cherry
天然樱桃



N-Teak
天然柚木



N-Golden Teak
天然金丝柚



N-Mahogany
天然桃花心木



N-Black Walnut
天然黑胡桃



N-Beech
天然榉木



N-Sapele
天然沙比利



EV-Sapele
科技沙比利



N-Bubingga
天然花梨



EV-055 (White Oak)
科技白橡



EV-609 (Black Oak)
科技橡木



Wenge
铁刀

Painted List

JHK-PT01

JHK-PT02



JHK-PT03



JHK-PT04



JHK-PT05



JHK-PT06



JHK-PT07



JHK-PT08



JHK-PT09



JHK-PT10



JHK-PT11



JHK-PT12



JHK-PT13



JHK-PT14



JHK-PT15



JHK-PT16



JHK-PT17



JHK-PT18



JHK-PT19



JHK-PT20

WAX OIL 木蜡油



JHK-WO01




JHK-WO02





JHK-WO03





JHK-WO04

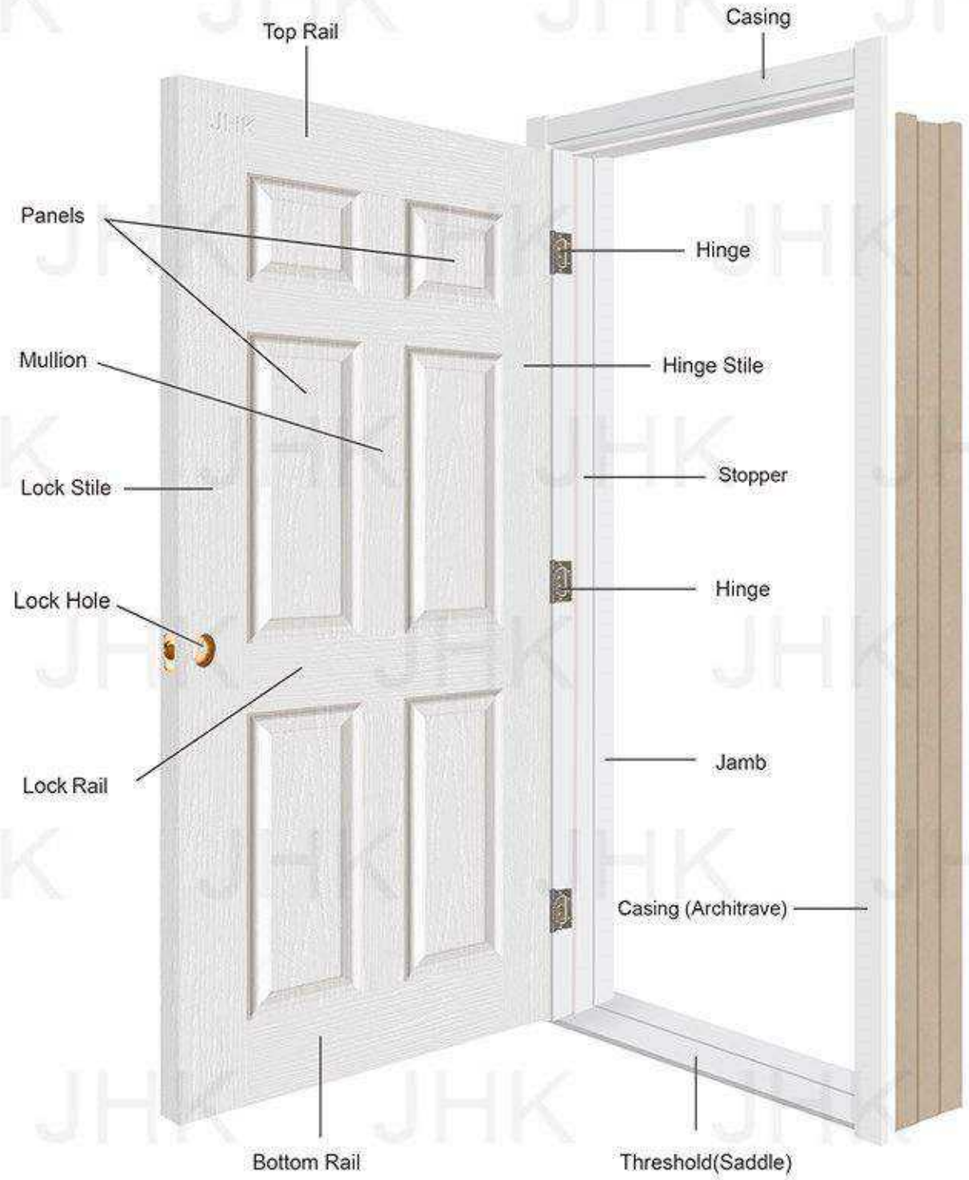


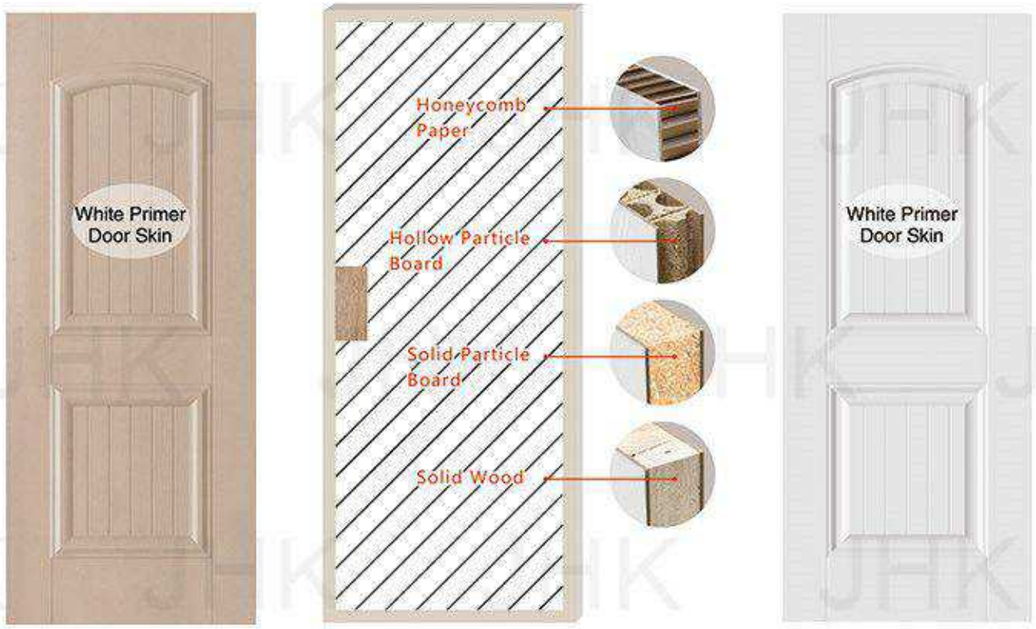


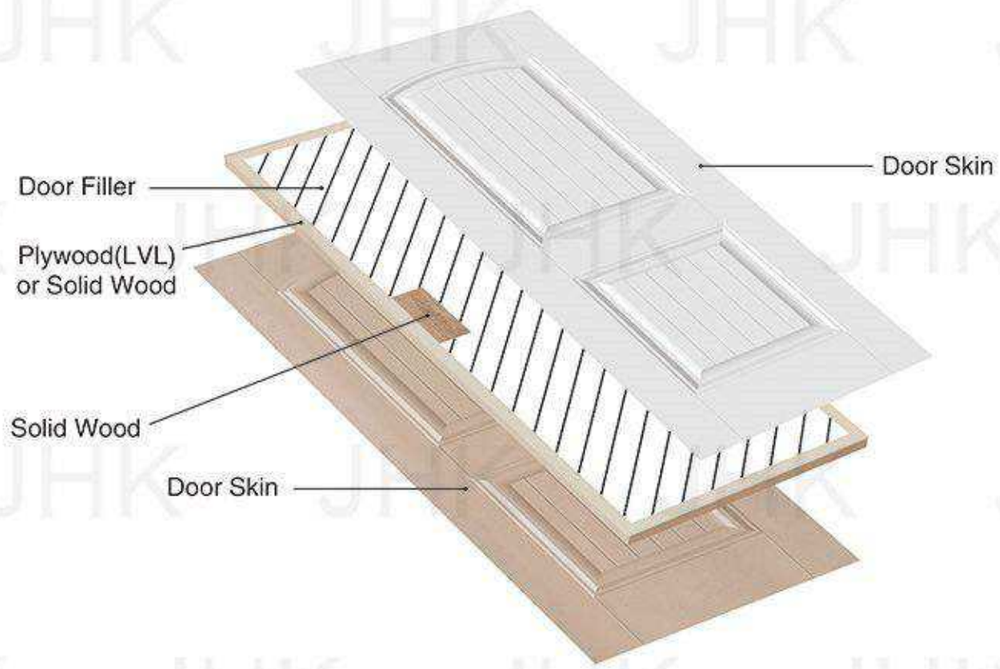

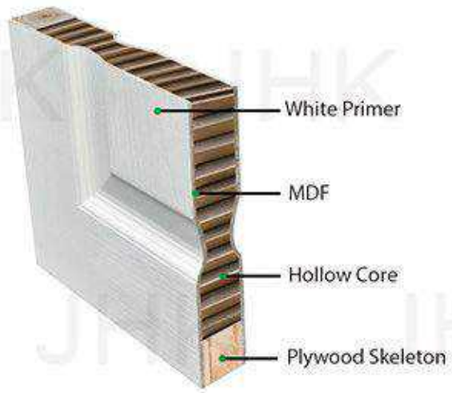

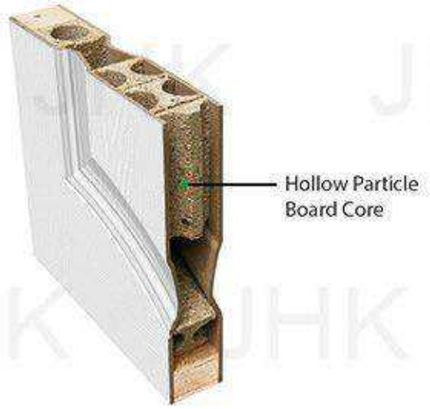

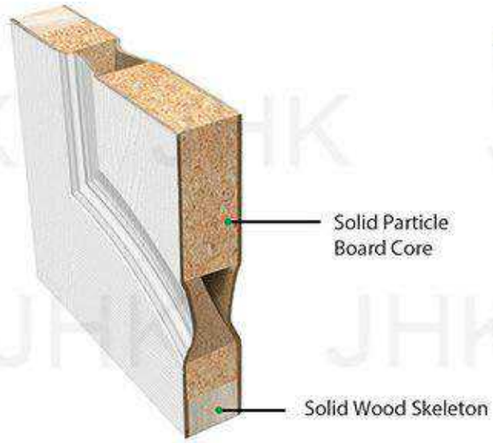

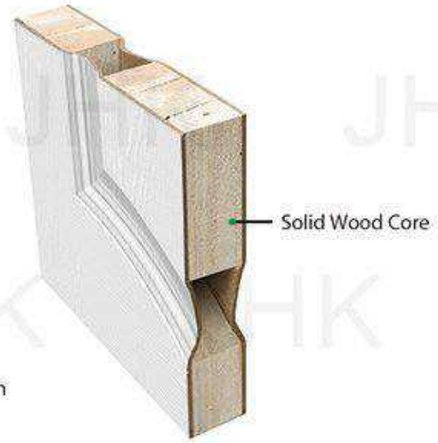

White Primer Door				
Size	Material		Surface	Painting Option
	Fill-in Core	Skeleton		
1. Height: 1900-2100mm (74.80-82.68in)	1. Hollow Core	1. Finger Joint Wood	1. Smooth White Primer	1. White Primer
2. Width: 610-1000mm (24-39.37in)	2. Particle Board	2. Plywood	2. Wood Grain White Primer	2. PU Painting UV Painting
3. Thickness: 35-45mm (1.375-1.75in)	3. Solid Core			3. Water Borne Painting


JHK-006 Wood Grain

Size	Filler	Surface	Packing	Depth	Jamb Thickness
24"x80"X1-3/8" (610mmX2032mmX35mm)	Honeycomb	Wood Texture	Bulk	8mm	18mm
	Hollow Particle Board		Pallet	12mm	
	Solid Particle Board	Smooth	Prehung	16.8mm	24mm
	Solid Wood				

Whiter Primer Door


JHK-004P Wood Grain


JHK-002 Wood Grain


JHK-003 Wood Grain


JHK-004 Wood Grain


JHK-007 Wood Grain


JHK-017 Wood Grain


JHK-F02 Straight Grain


JHK-F03 Wood Grain


JHK-F04 Vertical and Straight Grain



JHK-017 (Smooth)



JHK-M01 (Smooth)



JHK-M02 (Smooth)



JHK-M03 (Smooth)



JHK-M04 (Smooth)



JHK-M10 (Smooth)



JHK-M11 (Smooth)



JHK-S01 (Smooth)



JHK-S02 (Smooth)



JHK-S03 (Smooth)



JHK-S04 (Smooth)



JHK-S05 (Smooth)



JHK-S09 (Smooth)



JHK-001 (Smooth)



JHK-004P (Smooth)



JHK-006 (Smooth)



JHK-010 (Smooth)



JHK-011 (Smooth)



JHK-015 (Smooth)



JHK-017 (Smooth)



JHK-FC12



MDF Flush Door



◀ MDF Flush Door: 1. Competitive Price
2. High Density
3. Smooth Surface

Plywood Flush Door

HPL Flush Door : ▶
Can be as Fire-proof Door


◀ Plywood Flush Door :
Suitable for wet places



HPL Flush Door



Standard Groove Shapes

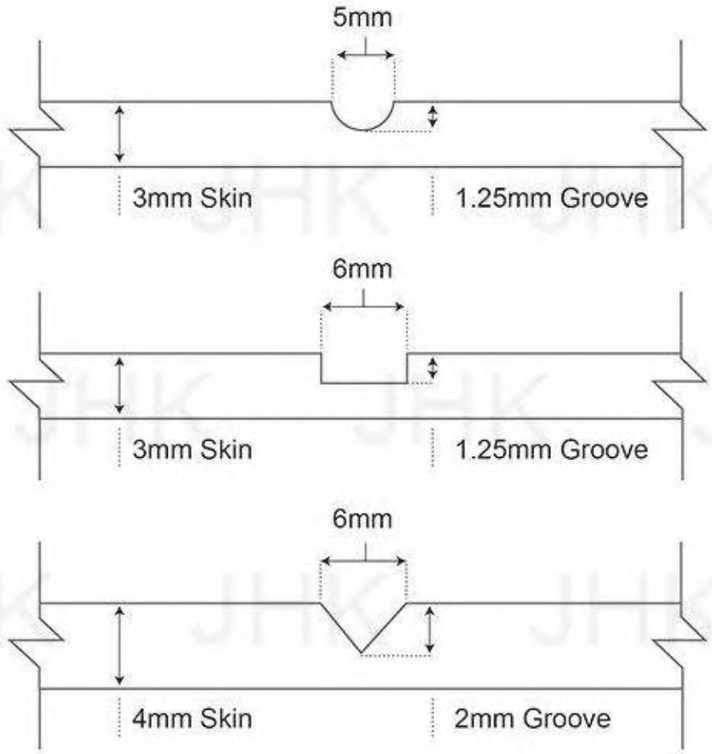

Skin Options (V Groove avaliable in 4mm or thicker)







JHK-FC03



JHK-FC04



JHK-FC05





JHK-FC06



JHK-FC07



JHK-FC08

Flush Door





JHK-F01-1



JHK-F01-2



JHK-F01-3



JHK-F01-4



JHK-F01-5



JHK-F01-6



JHK-F01-7



JHK-F01-8



JHK-F01-9



JHK-F01-10



JHK-F01-11



JHK-F01-12



JHK-F01-13




FIRE-PROOF DOOR


30min/60min/90min




Our product has passed the TUV certification

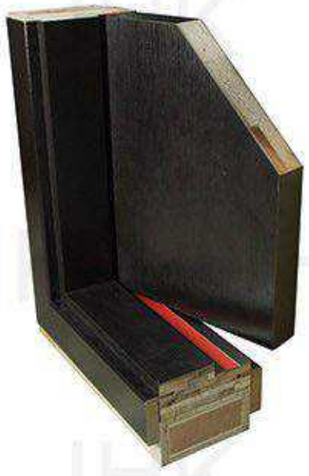


30MIN

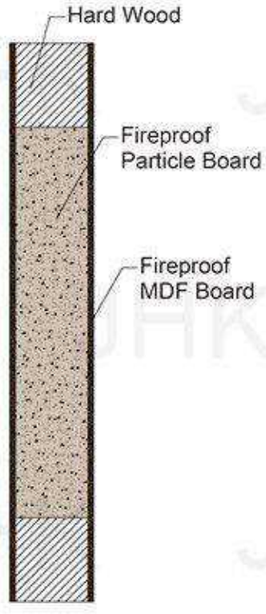

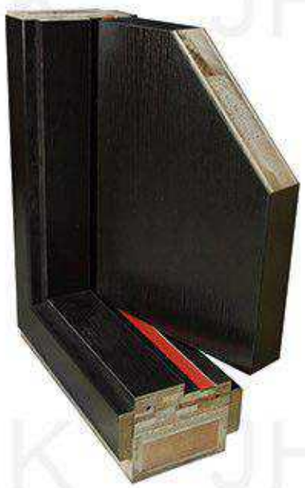


60MIN

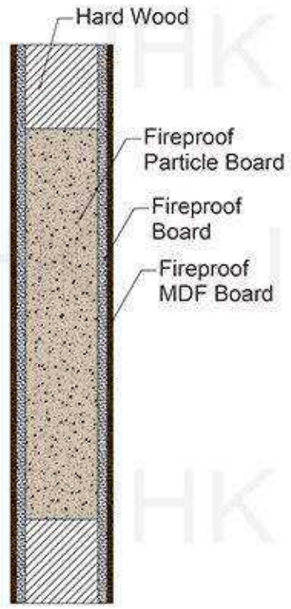



90MIN

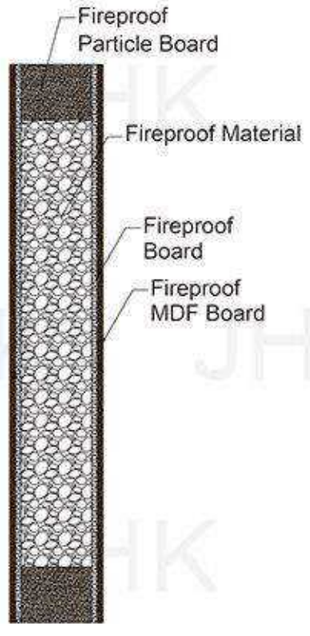

Flush & Fireproof Door



TEST REPORT

China

No.: TPI.18.09.9000481.001
Date: 2018-09-29
Page: 5 of 15

07：30	Deformation toward into the furnace was observed at the right top corner of the door leaf.
08：00	Right edge of the door leaf became black.
10：00	Deformation toward into the furnace was observed at all the corners of the door leaf.
11：00	Top of the doorframe and left edge of the door leaf became black.
15：00	Smoke release around the unexposed surface of the specimen started to reduce.
20：00	Fire endurance test terminated, the specimen still remained in the opening without sustained flame and ignition of cotton pad , also without through-openings observed. The maximum movement of the door leaf edges adjacent to the door frame was 38mm, not exceeding the limited value. The distance of the door leaf separate from the frame at the latch location was 3mm, not exceeding the limited value. Door frames to be evaluated with doors still remained securely fastened to the wall on all sides and there was no any permit through openings between frame and doors or between frame and adjacent wall.
20：30	The specimen was withdrawn from the furnace chamber and prepared for Hose Stream test.
22：00	Hose Stream test started, the test period was 12 seconds.
22：15	Hose Stream test terminated, the specimen still remained in the opening, and there was not any through-openings observed. The maximum movement of the door leaf edges adjacent to the door frame was 38mm, no exceeded the limited value.

Remark: details refer to Appendixs.

6. Conclusion

This specimen satisfied the performance requirements specified in UL 10C-2016 for the following periods:

This fire door assembly passed 20min exposure period with Fire Endurance test and subsequent Hose Stream test, the specimen met the criteria of the fire test standard for a 20 minutes fire endurance rating.

7. Validity

The structure and materials provided by the fire door shall be consistent with the test piece.
The test content and conclusions of this report refer to the standard UL 10C-2016. The test content and conclusions are valid within the standard validity period in case of no any change of the fire door of this model.This report will no longer be applicable if the type of fire door changes.

8. Appendixes

8.1 Photos- findings during the testing

China

Flush & Fireproof Door

TEST REPORT

No.: TPI.18.09.9000481.001
Date: 2018-09-29
Page: 6 of 15



1) The exposed surface of the specimen before the test.
2) The unexposed surface of the specimen before the test.
3) The unexposed surface of the specimen after test duration of 10 minutes.
4) The unexposed surface of the specimen after test duration of 20 minutes.

8.2 Curve and Record

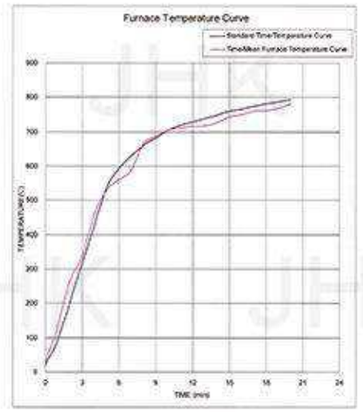


Figure 1 - Furnace Temperature Curve

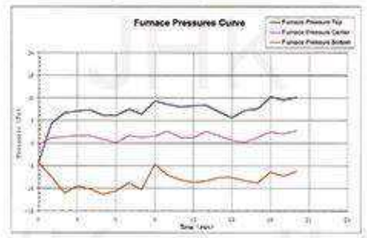


Figure 2 - Furnace Pressures Curve



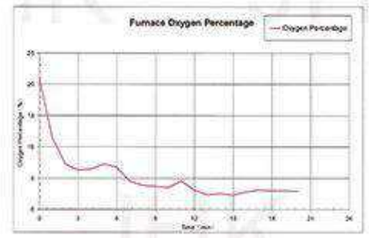



Figure 3 - Furnace Oxygen Percentage Curve


JHK-F01-14


Veneer &
Craftsman Door

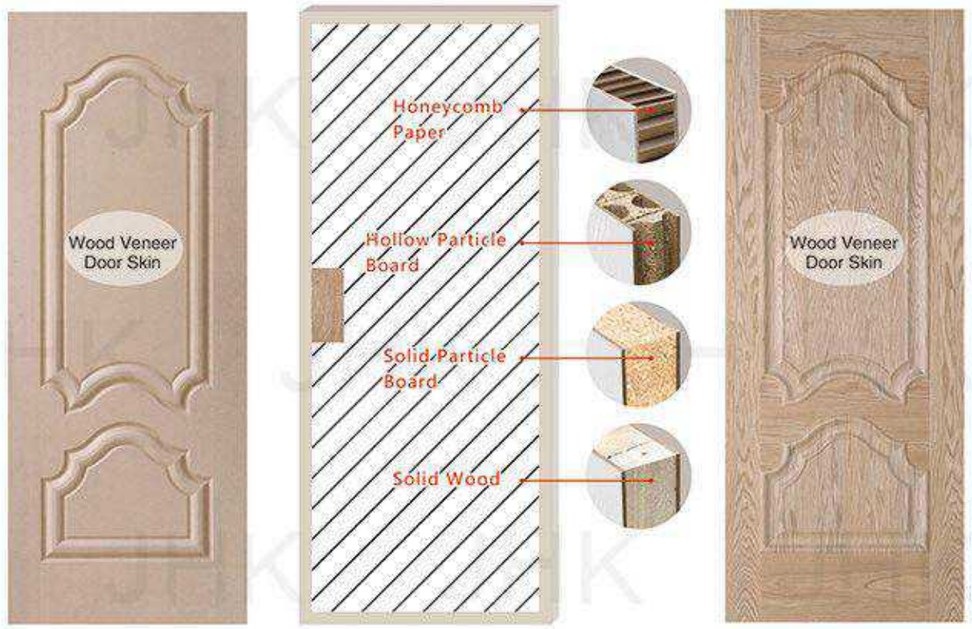

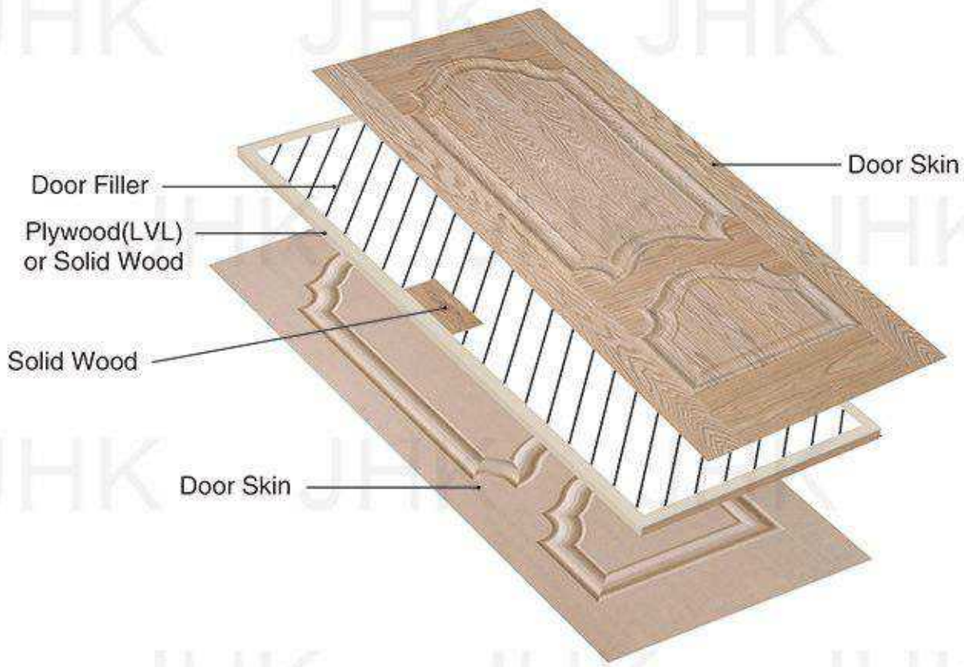

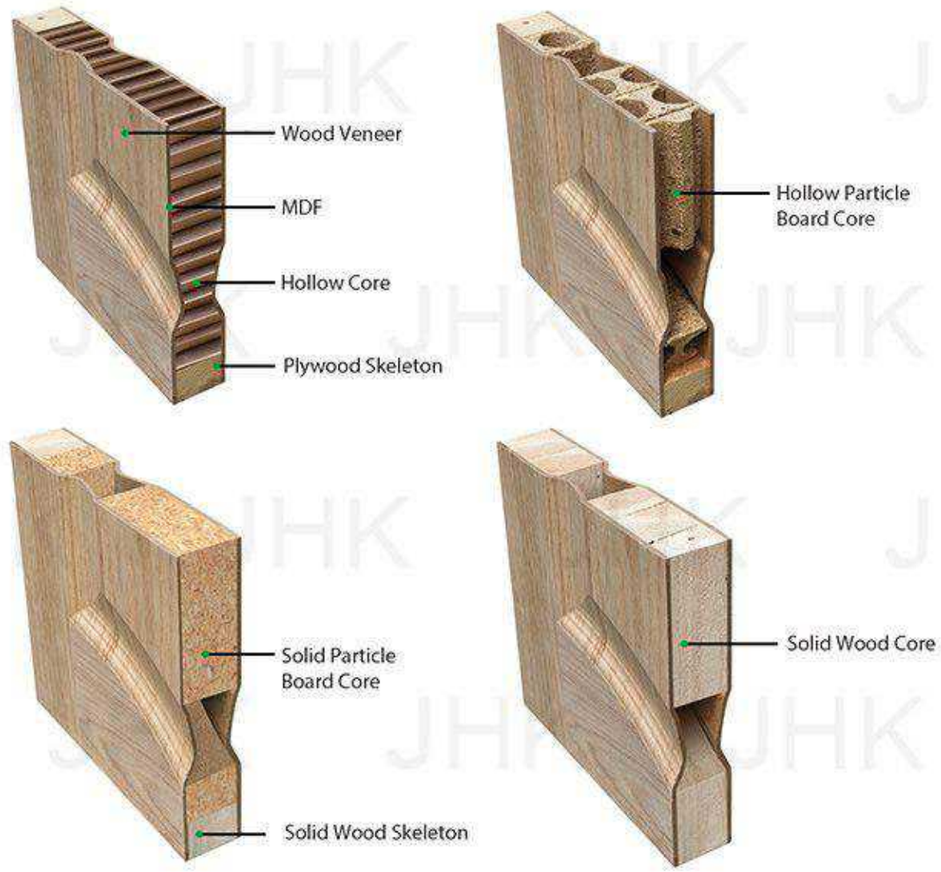


Wood Veneer Door				
Size	Material		Surface	Painting Option
	Fill-in Core	Skeleton		
1. Height: 1900-2100mm (74.80-82.68in)	1. Hollow Core	1. Finger Joint Wood	Wood Veneer	Unifinished 1. White Primer
2. Width: 610-1000mm (24-39.37in)	2.Hollow Particle Board Core	2. Plywood		2. PU Painting
3. Thickness: 35-45mm (1.375-1.75in)	3.Solid Particle Board Core			3. UV Painting
	4.Solid Wood Core			4.Water Base Painting



JHK-006
Oak

Size	Filler	Surface	Packing	Depth	Jamb thickness
24"x80"X1-3/8" (610mmX2032mmX35mm)	Honeycomb	Wood Veneer	Bulk	8mm	18mm
	Hollow Particle Board		Pallet	12mm	
	Solid Particle Board		Prehung	16.8mm	24mm
	Solid Wood				

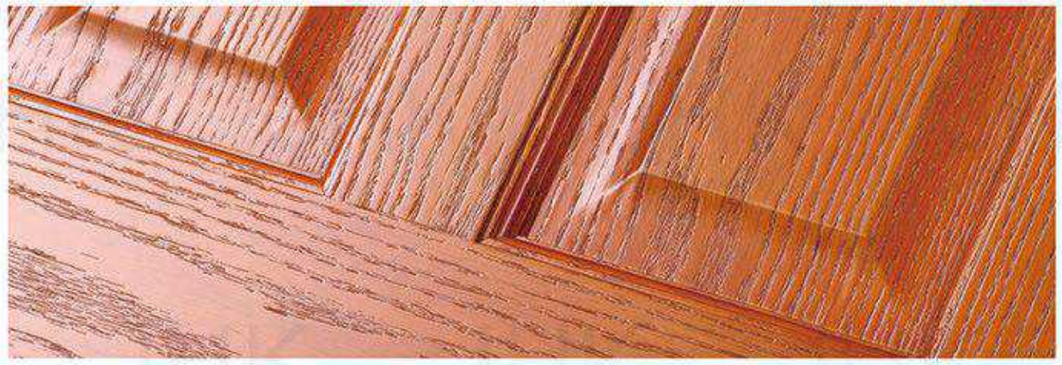

Veneer & Craftsman Door



JHK-000K (Mahogany)



JHK-001(Mahogany)



JHK-002(Sapele)



JHK-003K(Bubinga)



JHK-004(Red Oak)




JHK-005(Black Walnut)



JHK-007(Bubinga)



JHK-010(Cherry)

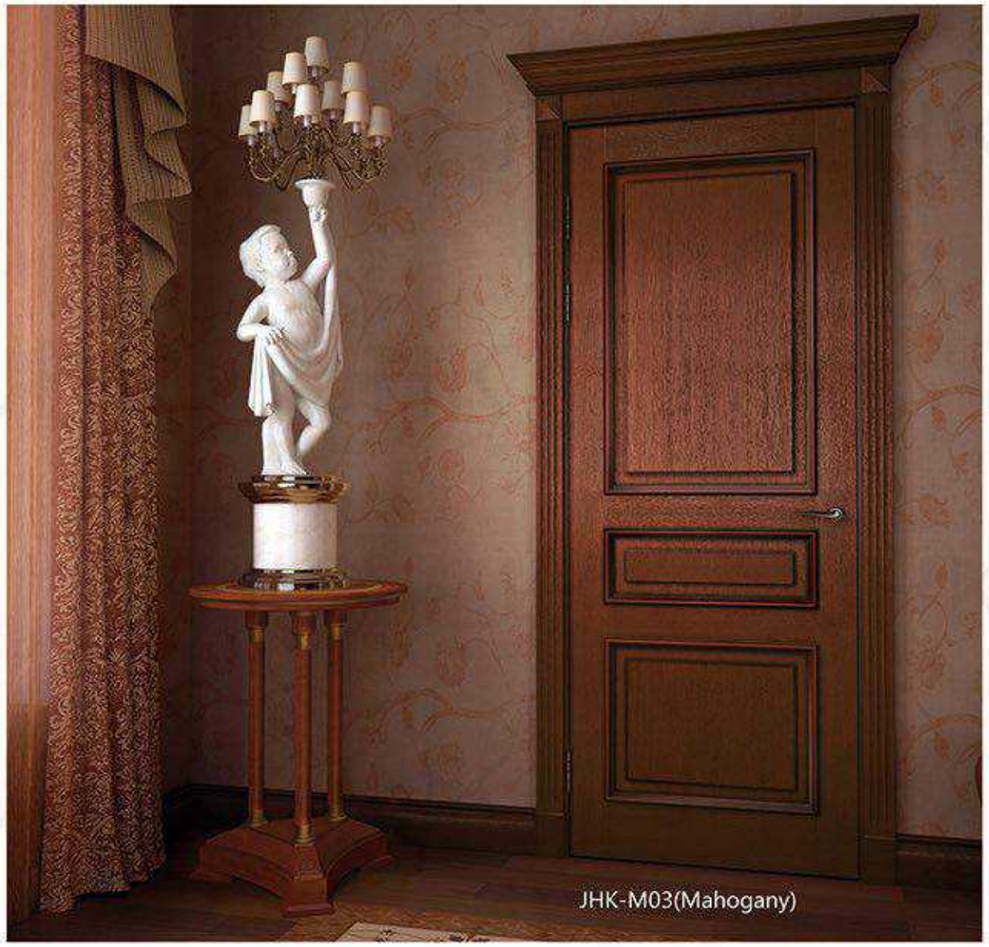

JHK-M03(Mahogany)



JHK-011(Black Walnut)



JHK-012(Black Walnut)



JHK-013(EV-Teak)

Veneer Door



JHK-S08K(Teak)



Veneer & Craftsman Door

"Glory is fleeting,

but obscurity is forever."

—— Napoléon Bonaparte



JHK-014(Sapele)



JHK-015(EV-Cherry)



JHK-017(Sapele)



JHK-020(Wenge)


JHK-008-1K
White Oak


JHK-018
Cherry


JHK-S04
White Oak



JHK-M01
Wenge


JHK-S05K
Ash


JHK-S06K
Mahogany


JHK-S07K
White Oak


JHK-S08K
Santos Rosewood

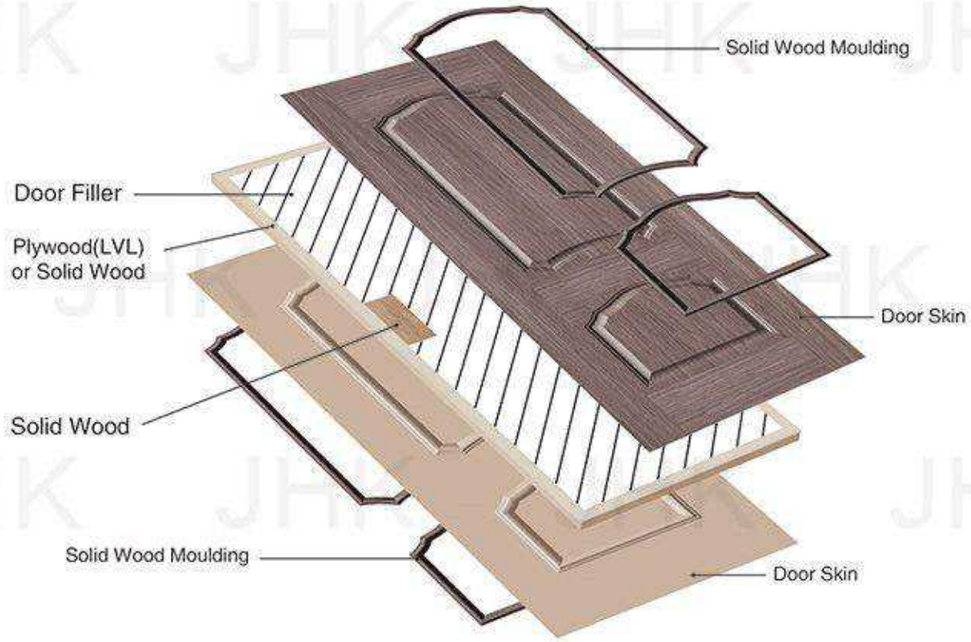

Veneer & Craftsman Door


Without Moulding


With Moulding






JHK-004P
Red Oak



JHK-008-1
Mahogany



JHK-S04
Red Oak

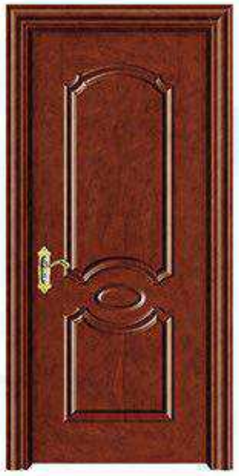

JHK-007
Sapele





JHK-M03 Cherry



JHK-005 Birch



JHK-017 Sapele




JHK-004P Black Walnut



JHK-S05 Red Oak



JHK-SK04-2

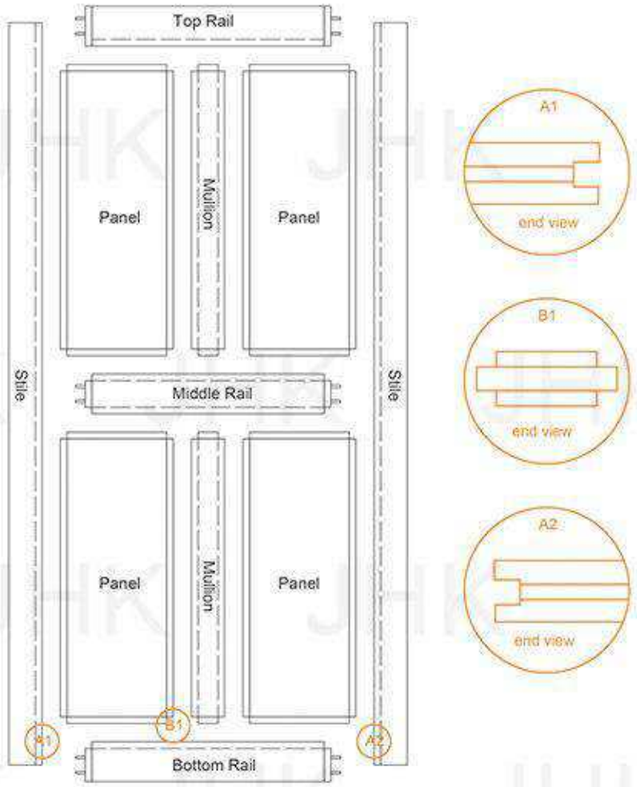

Shaker Door	
Size Range	Height:1900-2438mm(74.8- 96in)
	Width:610-1000mm(24- 39.37in)
	Thickness:35-45mm(1375-1.75in)
Surface	White Primer
	Wood Veneer
Material	MDF+Solid Wood
	Solid Wood
Solid Wood Species	Pine Wood
	Fir Wood
	Oak Wood
	Alder Wood
	Mahogany Wood
Painting Option	UV Painting
	PU Painting
	Water Base Painting

Smooth White Primer Door




JHK-SK01 光面 Smooth


JHK-SK02 光面 Smooth


JHK-SK03-1 光面 Smooth


JHK-SK03-2 光面 Smooth


JHK-SK05-1 光面 Smooth


JHK-SK07-1G 光面 Smooth


JHK-SK08G 光面 Smooth


JHK-SK09G 光面 Smooth


JHK-SK11G 光面 Smooth

Shaker & Solid Wood Door

Veneer Shaker Door





JHK-SK01G



JHK-SK02G



JHK-SK03-2



JHK-SK04-1



JHK-SK05-1



JHK-SK04-2



JHK-SK06



JHK-SK07-1G



JHK-SK07-2



JHK-SK08G




JHK-SK09G



JHK-SK11G

Solid Wood Shaker Door



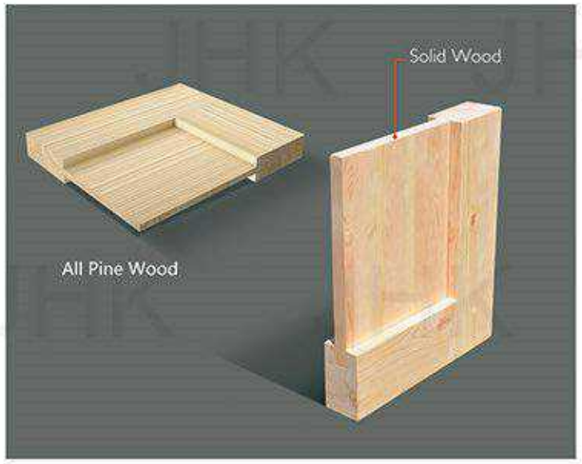

Shaker & Solid Wood Door



JHK-SK01G



JHK-SK02G



JHK-SK03-2



JHK-SK04-1



JHK-SK05-1




JHK-SK04-2



JHK-SK06



JHK-SK07-1G

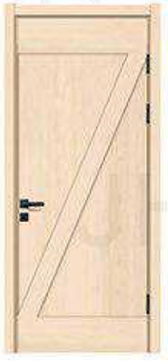

JHK-SK07-2



JHK-SK08G



JHK-SK09



JHK-SK11G

Chalkboard Shaker Door





2 PANEL

1 PANEL

CHALKBOARD

Our Chalkboard Door combines the fun in functionality to this unique and genuine stile & rail magnetic chalkboard design.

Exterior door is the focal spot of a house
An exquisite entrance can attract all passers-by.



OPTIONAL SHELVES



Classic-Craft. American Style Collection.4-Block Dentil Shelf



Classic-Craft. American Style Collection.4-Block Dentil Shelf



Classic-Craft. American Style Collection.16-Block Dentil Shelf



Classic-Craft. Canvas Collection.4-Block Dentil Shelf



Smooth-Star.4-Block Dentil Shelf



Fiber-Classic.4-Block Dentil Shelf



DOOR STRAP OPTIONS

Wrought Iron Strap Series

STRAPS FOR 2 PANEL AND PLANK DOORS



28" Williamsburg Hinge Strap

Antique Black
Antique Bronze
Antique Pewter



28" Canterbury Hinge Strap

Antique Black
Antique Bronze
Antique Pewter



28" Madrid Hinge Strap

Antique Black
Antique Bronze
Antique Pewter



28" Florentine Hinge Strap

Antique Black
Antique Bronze
Antique Pewter



Antique Black



Antique Bronze



Antique Pewter

STRAPS FOR PLANK DOORS




York Hinge Strap-28" wide x 12" tall

Antique Black
Antique Bronze
Antique Pewter




Coventry Hinge Strap - 28" wide x 14" tall

Antique Black
Antique Bronze
Antique Pewter



Litchfield Hinge Strap-28" wide x 14" tall

Antique Black
Antique Bronze
Antique Pewter




Salisbury Hinge Strap-30" wide x 22" tall


Antique Black
Antique Bronze
Antique Pewter

Shaker & Solid Wood Door


Panel & Sticking Options




Square Sticking




Quarter Round Sticking




Bevelled Sticking



Ovolo Sticking



Ogee Sticking



Outer Convex Sticking





Outer Convex Sticking-IV



Ovolo Sticking-III





Joint Style	Ovolo Sticking-III
Color Card	Alder 1#
Glass	

2 PANEL
ARCH V-GROOVE





Joint Style	Ovolo Sticking-III
Color Card	Mahogany 1#
Glass	

2 PANEL
ARCH V-GROOVE





Joint Style	Ovolo Sticking-III
Color Card	Alder 2#
Glass	

2 PANEL
ARCH V-GROOVE





Joint Style	Ovolo Sticking-III
Color Card	Alder 2#
Glass	

2 PANEL

Shaker & Solid Wood Door





Joint Style	Square Sticking-I
Color Card	Mahogany 1#
Glass	Diamond Glass

2 PANEL LITE





Joint Style	Square Sticking-I
Color Card	Mahogany 1#
Glass	Diamond Glass

2 PANEL LITE





Joint Style	Square Sticking-I
Color Card	Alder 2#
Glass	Diamond Glass

2 PANEL LITE
4-BIOCK DENTIL SHELVE





Joint Style	Square Sticking-I
Color Card	Alder 2#
Glass	Diamond Glass

2 PANEL LITE
4-BIOCK DENTIL SHELVE





Joint Style	Ovolo Sticking-III
Color Card	Alder 2#
Glass	Diamond Glass

1 PANEL
V-GROOVE 3/4 LITE
WROUGHT IRON





Joint Style	Ovolo Sticking-III
Color Card	Mahogany 1#
Glass	Diamond Glass


1 PANEL
V-GROOVE 3/4 LITE
WROUGHT IRON





Joint Style	Ovolo Sticking-III
Color Card	Mahogany 1#
Glass	Diamond Glass

1 PANEL
V-GROOVE 3/4 LITE
WROUGHT IRON

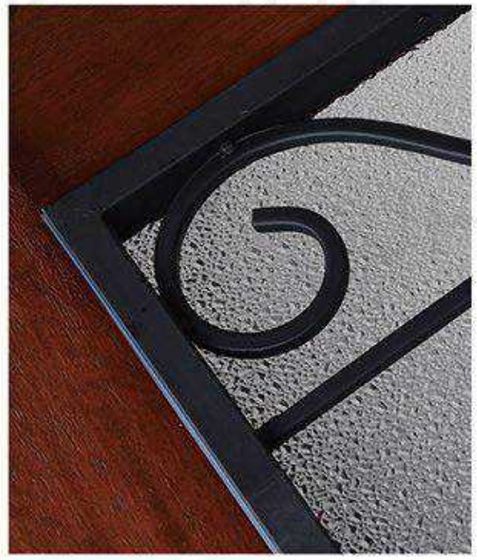

Shaker & Solid Wood Door



FULL LITE



Joint Style	Ovolo Sticking-III
Color Card	Mahogany 1#
Glass	Diamond Glass



FULL LITE



Joint Style	Ovolo Sticking-III
Color Card	Mahogany 1#
Glass	Ice Flower Glass



FULL LITE
WROUGHT IRON



Joint Style	Ovolo Sticking-III
Color Card	Mahogany 1#
Glass	Diamond Glass



FULL LITE



Joint style	Ovolo Sticking-III
Color card	Alder 1#
Glass	Rain Glass



1 PANEL 3/4 LITE
WROUGHT IRON
DIAMOND GLASS



Joint style	Ovolo Sticking-III
Color card	Alder 1#
Glass	Diamond glass




Joint style	Ovolo Sticking-III
Color card	Mahogany 1#
Glass	Diamond Glass




1 PANEL 3/4 LITE
WROUGHT IRON
DIAMOND GLASS

Shaker & Solid Wood Door

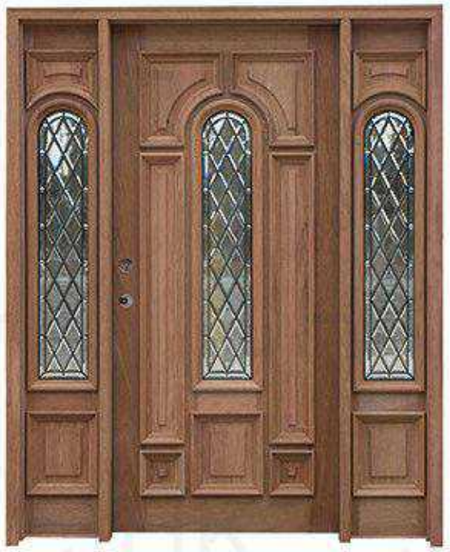


JHK-012-1




Joint Style	Outer Convex Sticking-III
Color Card	Mahogany 1#
Glass	Diamond Glass



Joint Style	Square Sticking-I
Color Card	Mahogany 1#
Glass	Diamond Glass

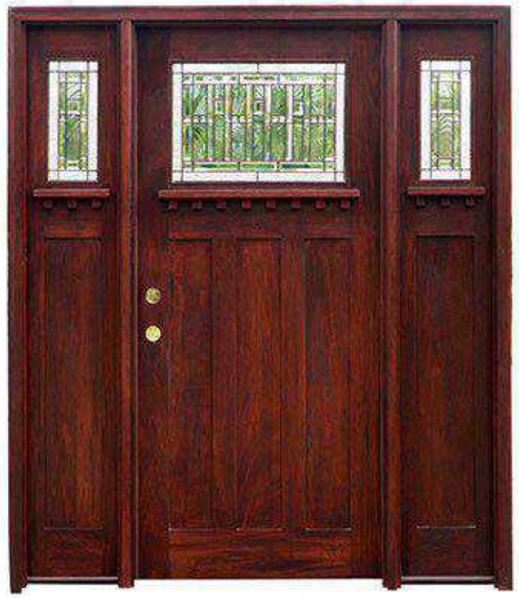


JHK-G16-3

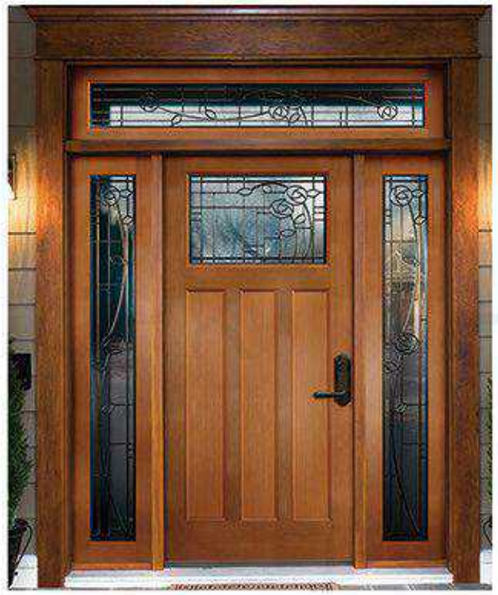

JHK-G16-2



Joint Style	Square Sticking-I
Color Card	Mahogany 1#
Glass	Diamond Glass




Joint Style	Outer Convex Sticking-III
Color Card	Mahogany 1#
Glass	Diamond Glass



JHK-003



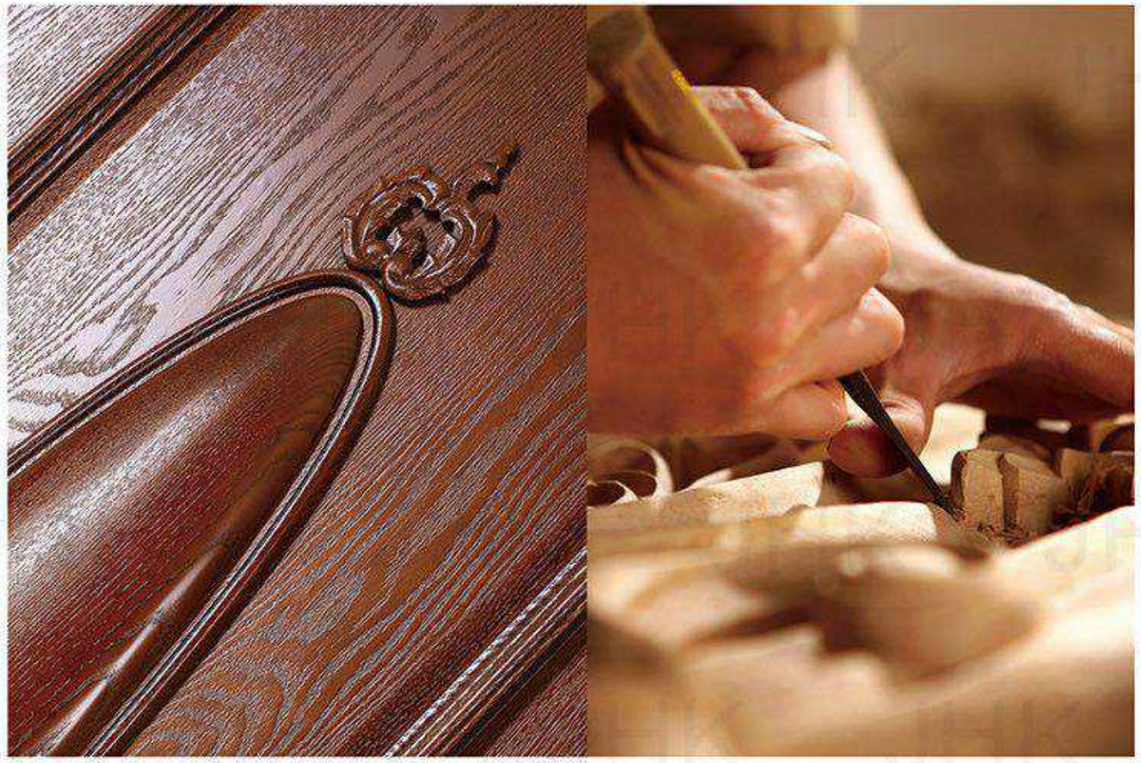



JHK-Arch Door　JHK-000-CS　JHK-003-CS　JHK-S07-CS

"Art is not a handicraft, it is the transmission of feeling theorist has experienced."

—— *Leo Tolstoy*







JHK-M03-CS JHK-007-CS JHK-017-CS JHK-004P-CS






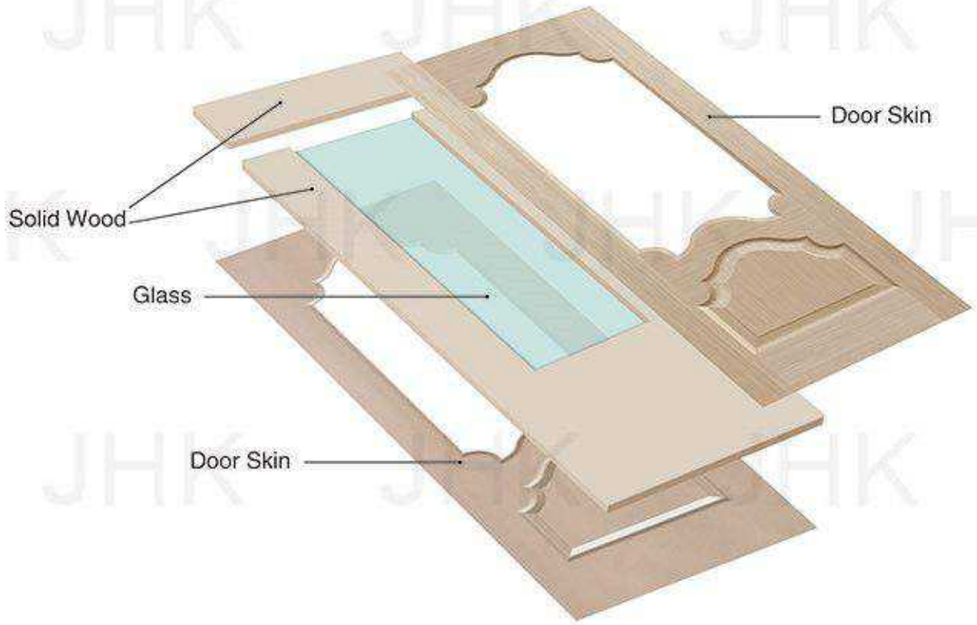

Glass Door Profile Options

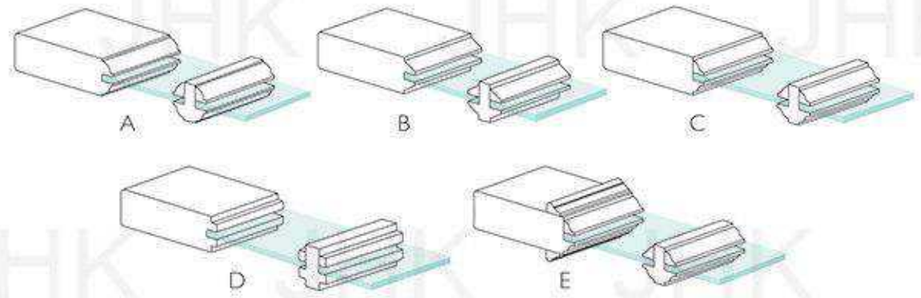

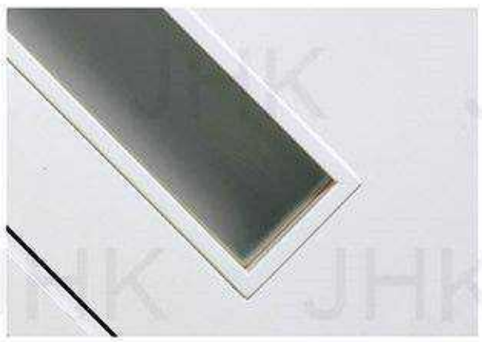





Glass Door			
Size	Material		Painting Option
	Glass Type	Fill-core	
1. Height: 1900-2438mm (74.80-96in)	1. Clear Glass	1. Hollow Core	1. White Primer
2. Width: 610-1000mm (24-39.37in)	2. Frosted Glass	2. Particle Board	2. PU Painting
3. Thickness: 35-45mm (1.375-1.75in)	3. Mosaic Glass	3. Solid Core	3. UV Painting
			4.Water Base Painting




Tempered Glass



Laminated Glass

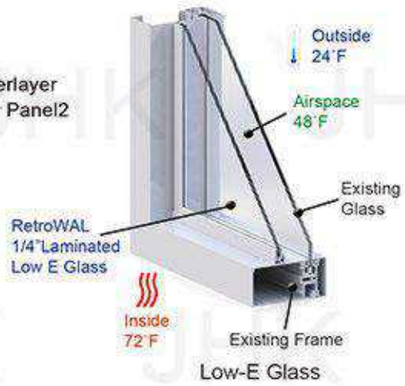

Low-E Glass

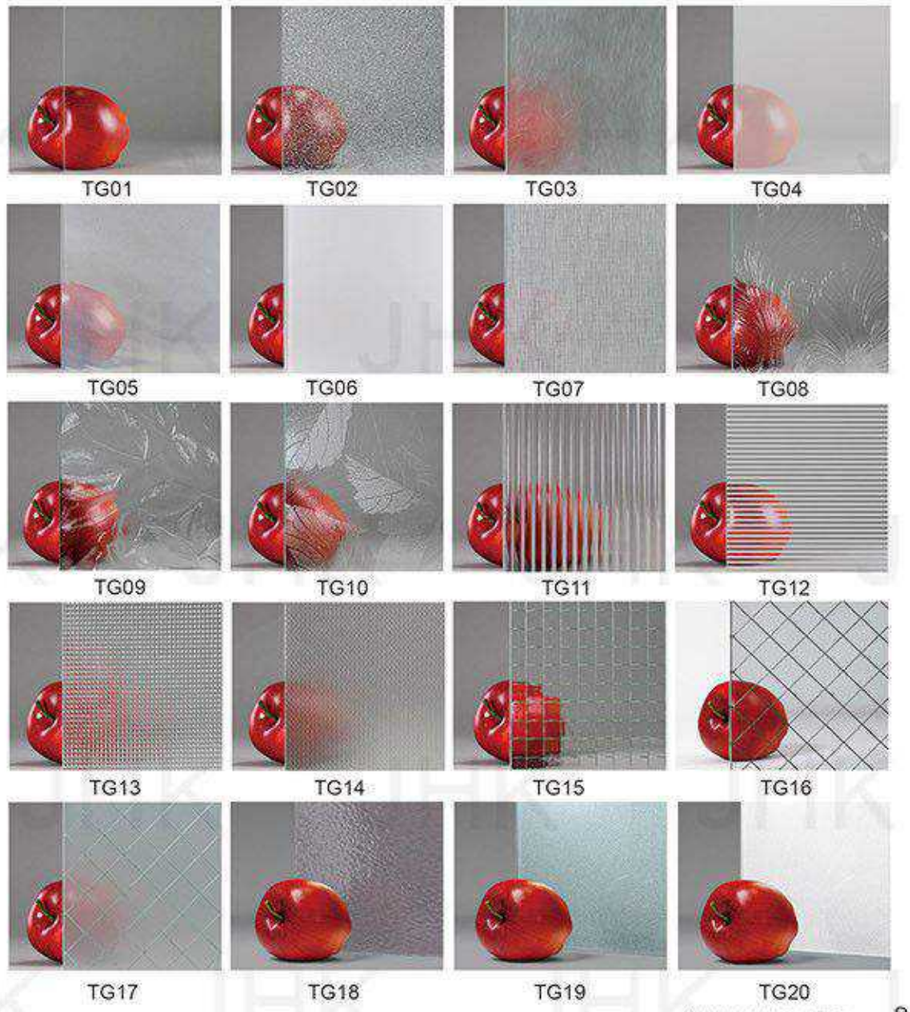


MG01


MG02


MG03


MG04


MG05


MG06


MG07


MG08


MG09


MG10


MG11


MG12

STEEL ART OPTIONS


ST01


ST02


ST03

Glass Door




ST04


ST05





JHK-G01
SQUARE FULL LITE



JHK-G02
ARCH TOP FULL LITE



JHK-G03
ROUND TOP FULL LITE



JHK-G04
WAVE TOP FULL LITE



JHK-G08
WAVE TOP ¼ LITE
1 PANEL



JHK-G05
¼ LITE
1 PANEL



JHK-G06
¼ LITE
1 PANEL



JHK-G07
ROUND TOP ¼ LITE
1 PANEL





JHK-G09
1/2 LITE 1-PANEL



JHK-G10
WAVE TOP HALF LITE
1 PANEL



JHK-G11
½ LITE
1 PANEL V-GROOVE



JHK-G12
ROUND TOP HALF LITE
1 PANEL V-GROOVE





JHK-G13
WAVE TOP HALF LITE
1 PANEL V-GROOVE



JHK-G14
HALF LITE
1 PANEL



JHK-G15
1 LITE
1 PANEL



JHK-G16
1 LITE
1 PANEL V-GROOVE



JHK-G17
Full View 4 Lite



JHK-G18
FULL VIEW
8 LITE



JHK-G19
ARCH TOP
FULL VIEW 8 LITE



JHK-G20
ROUND TOP FULL VIEW 8 LITE



JHK-G21
WAVE TOP
FULL VIEW 8 LITE



JHK-G22
FULL VIEW 12 LITE



JHK-G23
ROUND TOP FULL VIEW 12 LITE



JHK-G24
FULL VIEW
15 LITE



JHK-G25
3/4 VIEW 8 LITE 1-PANEL



JHK-G29
1/2 View 6 Lite 1-Pane1



JHK-G27
ROUND TOP ¾ VIEW
8 LITE 1 PANEL



JHK-G28
WAVE TOP 3/4
VIEW 8 LITE 1-PANEL



JHK-G26
ROUND TOP 3/4
VIEW 8 LITE 1-PANEL



JHK-G31
1/2 VIEW 6 LITE
1-PANE1 PLANK





JHK-G32
4 LITE
1 PANEL V-GROOVE



JHK-G33
9 LITE MISSION



JHK-G30
6 LITE
1 PANEL



JHK-G35
9 LITE MISSION
1 PANEL

Glass Door

Tennyson Now sleeps the crimson petal, now the white; Nor waves the cypress in the palace walk; Nor winks the gold fin in the porphyry font: The firefly wakens: waken thou with me.

——— *Lord Alfred Douglas*



JHK-G29

PVC Door




PVC & Melamine Door

Profession From Concentration
17 Years' Experiences focusing on wood doors

MDF Thickness: 5/6/8mm
PVC Film: 0.012/0.014/0.016
Filler: MDF, Hollow Core, Particle Board Core, Solid Wood Core

PVC Door	
Size Range	Height: 1900–2200mm (74.8-86.6in)
	Width: 610-1050mm (24-41.34in)
	Thickness: 30-45mm (1.18-1.75in)
Surface	0.12/0.14/0.16mm PVC Film
Skin Board	5/6/8mm MDF/HDF (Density>850kg/m³)
Fill-in Core	MDF Sticks Core
	Honeycomb Paper Core
	Particle Board Core
	Solid Wood Core
Edge Sealing Type	Dovetail Groove
	PVC Strips
	Solid Wood
Finish Type	Finished

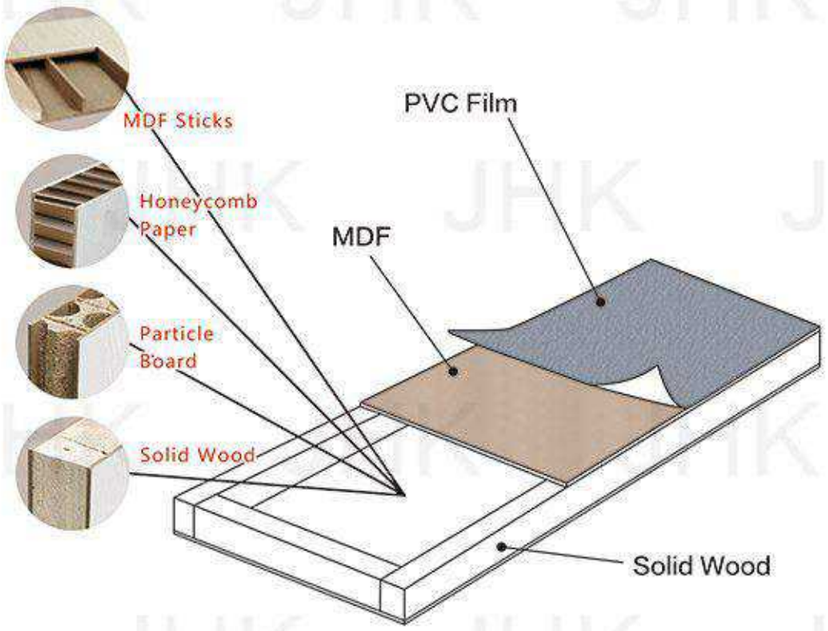


MDF+MDF STICKS INSIDE


MDF+HONEYCOMB PAPER INSIDE



MDF+TUBE PARTICLE BOARD INSIDE


MDF+SOLID WOOD INSIDE



Dovetailing
Thickness:8mm
Depth:3mm

PVC Sealing Strip
Thickness:1mm

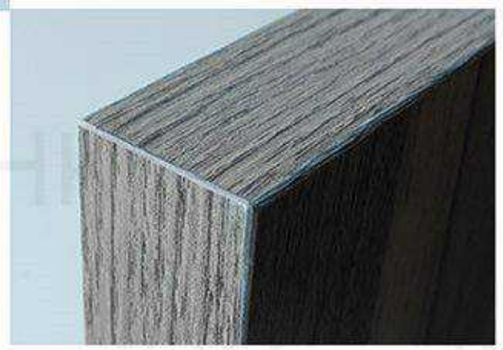

PVC Color Sample



Profession From Concentration
17 Years'Experiences focusing on wood doors



Door Design	JHK-P
Door Size	2100X850X40mm
Surface MDF	5mm MDF
PVC Film	0.014-0.020mm
Filler	MDF Sticks
Frame	MDF+Plywood
Casing Material	MDF
Casing Size	60X12mm
N.W	18KG
Packages	Pallet





PVC Door


JHK-P01


JHK-P02


JHK-P03


JHK-P04


JHK-P05


JHK-P06


JHK-P07


JHK-P08


JHK-P09


JHK-P10


JHK-P11


JHK-P12


JHK-P13


JHK-P14


JHK-P15


JHK-P16


JHK-P17


JHK-P18


JHK-P19


JHK-P20


JHK-P21


JHK-P22


JHK-P23


JHK-P24


JHK-P25


JHK-P26


JHK-P27


JHK-P28


JHK-P29


JHK-P34


JHK-P30


JHK-P31


JHK-P32


JHK-P33





PVC & Melamine
Door


ECO FRIENDLY,PAINT FREE,WEAR RESISTANT


1. Surface MDF Thickness:
   3mm,4mm,6mm
2. Surface Melamine Paper:
   0.015–0.020mm
3. Filler:
   Hollow core,
   Particle board core,
   Solid wood core,
   Fireproof material



Door Material	Melamine+MDF
Door Type	Melamine Door
Size	Length:1900mm-2150mm Width:600mm-1050mm Thickness:35mm-45mm
Density	>850 g/cm3
Moisture	6%~10%
Finish Type	Finished
HCHO	E1
MOQ	100 PCS
Payment	By T/T or L/C at sight,30% deposit and balance before loading
Shipment	Within 45 days after receive the deposit
Packing Detail	30-35 PCS/Pallet,Extra Bundles are available
Term of Shipment	FOB

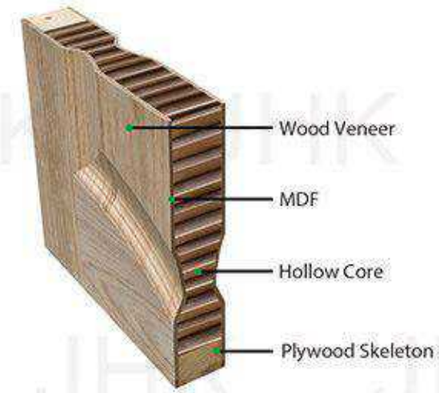

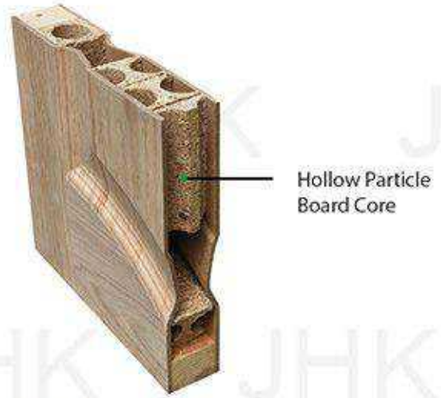

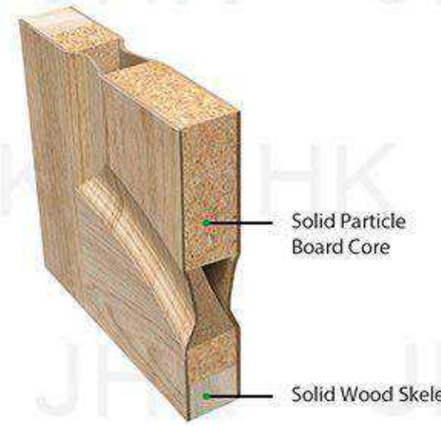





COLOR SAMPLE

ECO FRIENDLY,PAINT FREE,WEAR RESISTANT



MDC-001 MDC-002 MDC-003 MDC-004 MDC-005



MDC-006 MDC-007 MDC-008 MDC-009 MDC-010



MDC-011 MDC-012 MDC-013 MDC-014 MDC-015



MDC-016 MDC-017 MDC-018 MDC-019 MDC-020



MDC-021 MDC-022 MDC-023 MDC-024 MDC-025



JHK-MD01



JHK-MD02



JHK-MD03

JHK-MD04



JHK-MD05



JHK-MD06



JHK-MD07



JHK-MD08



JHK-MD09



JHK-MD10



JHK-MD11



JHK-MD12



JHK-MD13



JHK-MD14



JHK-MD15



JHK-MD16



JHK-MD17



JHK-MD18


JHK-MD19


JHK-MD20


JHK-MD21


JHK-MD22


JHK-MD23


JHK-MD24


JHK-MD25


JHK-MD26


JHK-MD27


JHK-MD28


JHK-MD29


JHK-MD30


JHK-MD31


JHK-MD32


JHK-MD33


JHK-MD34


JHK-MD35


JHK-MD36


JHK-MD37


JHK-MD38


JHK-MD39


JHK-MD40


JHK-MD41


JHK-MD42





WPC & ABS & Fiberglass Door



JHK-W002



JHK-W003



JHK-W004

Panel Construction	Adgesuve Attach Each Pieces Together	Adgesuve Attach Each Pieces Together	Adgesuve Attach Each Pieces Together
Moisture	No	Yes	Yes
Color	Paintable	White	White And Paintable
Termites And Pests	No Resistant	Resistant	Resistant
Thickness	3mm	1-1.5mm	3-4mm
Flammability	Yes	No	No
Duty	Light Duty	Medium Duty	Heavy Duty



JHK-W005 JHK-W006 JHK-W007





JHK-W008



JHK-W009






1.Insert the plastic connector into the side slot of the top head frame.


2. Connect the head frame with the side frame.


3. After connected sketch


4. Fold the iron sheet into a 90-degree right angle to connect and fix the top and side frame.


5. The sketch of installed iron sheet


6. Fix the iron sheet on the side frame. Each side frame need 6 sheet to connect the side frame with the wall.


7. If there is a transom, put it inside the frame. The height can be adjusted according to the needs.


8. Use long screw to fix the transom. Please notice that the length of the screw must be longer than the thickness of the side frame. The spot of the screw is on the 1mm deep groove.


9. The final sketch.

Description:Cornice door jamb
Color:Dark Oak
Weight:11.6–12kg
Size:70X200cm
80X20cm
90X200cm

Note:Color may vary due to lighting


WPC Casing


Solid Wood Casing


WPC Jamb


Solid Wood Jamb

Jamb & Casing





A-01


A-02


A-03


A-04


A-05

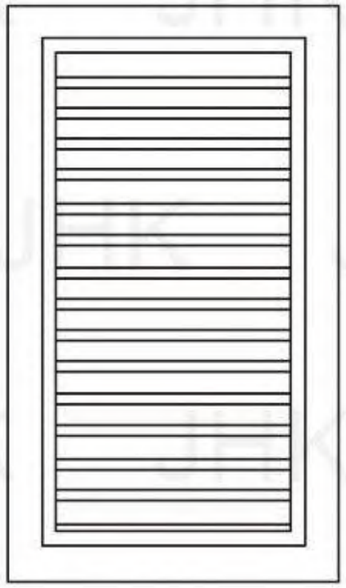

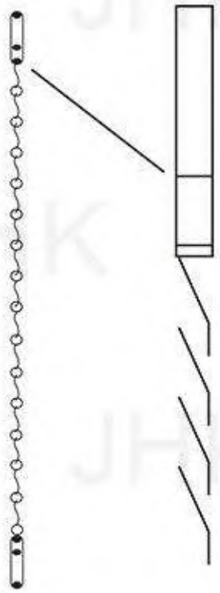

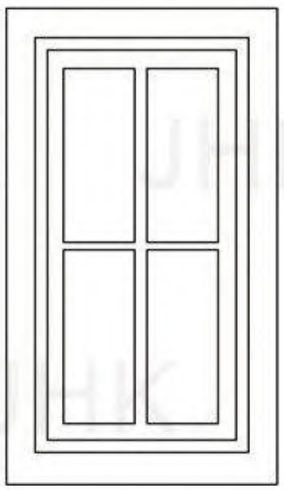

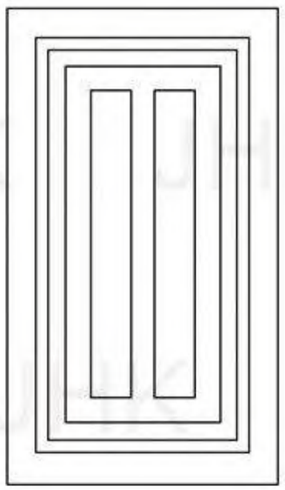

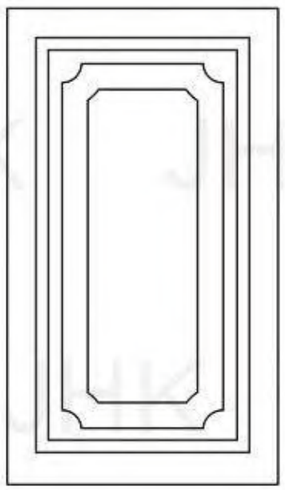


ABS-001


ABS-002


ABS-003


ABS-004


ABS-005


ABS-006


ABS-007


ABS-008



Water-proof



Corrosion-Proof



Insect-proof



Termite-proof

ABS door is a kind of new material door which is made of full ABS material. ABS consists of Acrylonitrile, Buta-diene and Styrene, which is harmless to the human body. Since this product is made up of plastics, it is moisture-free and its durability is great without prevents any bends or twists, Furthermore, it is very light, which makes it easy for construction.

ABS door can resist up to 90˚C directly and 120˚C indirectly.

ABS door is an economic door that has superior durability, gloss, painting and also resistible to moisture and water.

ABS door has great resistibility to moisture so that it does not have any side effets, such as,cracks, raises or molds, which make it easy to use in bathrooms.







ABS-009



ABS-010



ABS-011



ABS-012



ABS-013



ABS-014






WPC & ABS & Fiberglass Door
JHK-FD06



Dark Walnut




Mahogany



Medium Walnut




White

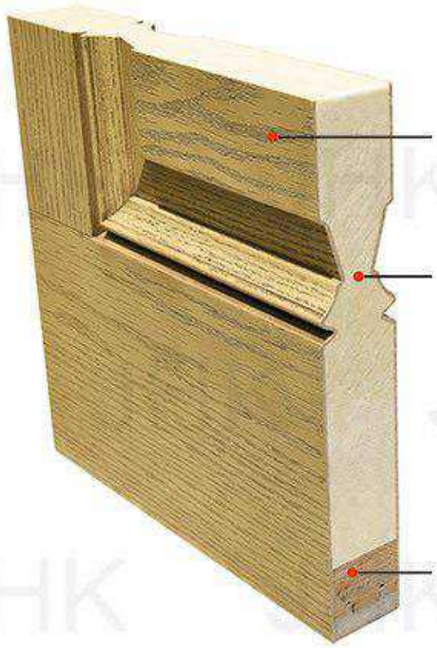

Fiberglass Door	
Size Range	Height:1900-2438mm (74-13/16in-96in)
	Width:305-1000mm (12in-39-3/8in)
	Thickness:25-45mm (1in-1-3/4in)
Surface Material	Fiberglass
Filler Material	PU Foam
Density	1.65-1.85kg/dm3
Tensile Strength	350-450Mpa
Bending Strength	388Mpa
Finish Type	Stained



JHK-FD07-1
Medium Walnut

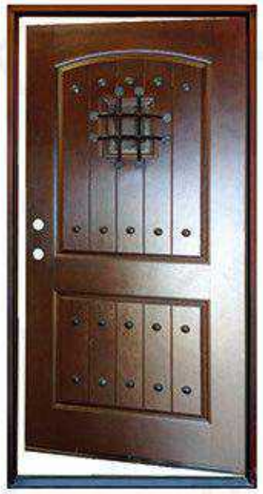

JHK-FD07-2
Dark Walnut



JHK-FD07-2
Classic



JHK-FD07-3
Medium Walnut



JHK-FD07-3
Classic

2 PANEL PLANK SERIES JHK-FD09

	Call Out Size	Actual Unit Size	Rough Opening
Single Door Slab	3/0x6/8	35 1/2 " x 78 1/2 "	N/A
Single Pre-hung Door	3/0x6/8	37 1/4 " x 81 "	38 " x 82 "
Double Pre-hung door	6/0x6/8	73 1/2 " x 81 "	74 " x 82 "
Single Door w/ 2 Side Lite	1/0-3/0-1/0	63 1/2 " x 81 "	64 " x 82 "



Dark Walnut



Medium Walnut



Classic



JHK-FD04



JHK-FD05

	Call Out Size	Rough Opening
Single Door Slab	3/0x6/8	N/A
Single Pre-hung Door	3/0x6/8	38 " x 82 "
Double Pre-hung door	6/0x6/8	74 " x 82 "
Single Door w/ 2 Side Lite	1/0-3/0-1/0	65 " x 82 "




JHK-FD03



JHK-FD02



JHK-FD01

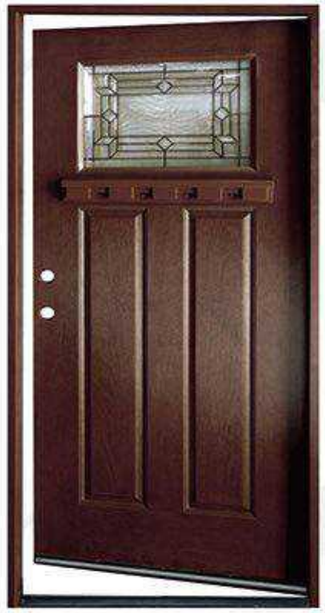

JHK-FD08-1



JHK-FD08-2



JHK-FD08-3

	Call Out Size	Actual Unit Size	Rough Opening
Single Door Slab	3/0x6/8	35 1/2 " x 78 1/2 "	N/A
Single Pre-hung Door	3/0x6/8	37 1/4 " x 81 "	38 " x 82 "
Double Pre-hung door	6/0x6/8	73 1/2 " x 81 "	74 " x 82 "
Single Door w/ 2 Side Lite	1/0-3/0-1/0	64 " x 81 "	65 " x 82 "



JHK-FD09-2



JHK-FD09-3

	Call Out Size	Actual Unit Size	Rough Opening
Single Door Slab	3/0x6/8 3/0x8/0 2/6x6/8	35 1/2 " x 78 1/2 " 35 1/2 " x 94 1/2 " 29 1/2 " x 78 1/2 "	N/A N/A N/A
Single Pre-hung Door	3/0x6/8 3/0x8/0	37 1/4 " x 81 " 37 1/4 " x 97 "	38 " x 82 " 38 " x 98 "
Double Pre-hung door	5/0x6/8 6/0x6/8 6/0x8/0	61 1/2 " x 81 " 73 1/2 " x 81 " 73 1/2 " x 97 "	62 " x 82 " 74 " x 82 " 74 " x 98 "
Single Door w/ 2 Side Lite	1/0-3/0-1/0	63 1/2 " x 81 "	64 " x 82 "




JHK-FD09-1



ADJUSTABLE OAK SILL (INSWING)

Aluminum door sills,
with an Oak threshold that can be
adjusted to create a secure seal to
the bottom of the door.
Both inswing and outswing
adjustable sill options are available.



ADJUSTABLE OAK SILL (OUTSWING)



PVC AND ALUMINUM SILL

Non-adjustable pvc and aluminum sill
for openings with limited exposure to
the elements



BOTTOM SWEEP

Material: TPR
Function:Insect-proof, Windproof,
Sound-proof, Crashproof




Most commonly used in laundry rooms or closet areas,louver doors ate best in parts of your home that require consistent air flow yet limited light.



Material	MDF
	Solid Wood (Pine,Oak,Alder, Mahogany,Teak,etc)
Designs	Full Louver,Half Louver
Finishing Type	UV Painting,PU Painting
Packing Way	Pallet/Bundles/Pre-hung

Louver Door

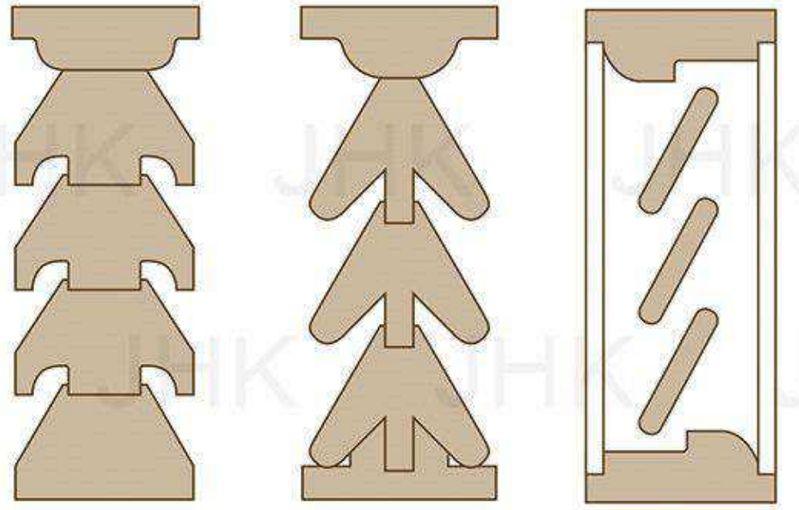



Louver Blade Width	
Small Blade	1-1/4" -1-3/4"
Middle Blade	2"-2-1/4"
Large Blade	3"



Open



Close



Operable



Bi-fold door fully opens to seamlessly connect your living space with your terrace,patio or garden


JHK-B05


JHK-B02


JHK-B03


JHK-B04

"The trees come up to my window like the yearning voice of the dumb earth."

——— *Rabindranath Tagore*


JHK-B06


JHK-B08







JHK-B06



JHK-B07



JHK-B07



JHK-B07



JHK-B03




JHK-B03



JHK-B07




JHK-B06

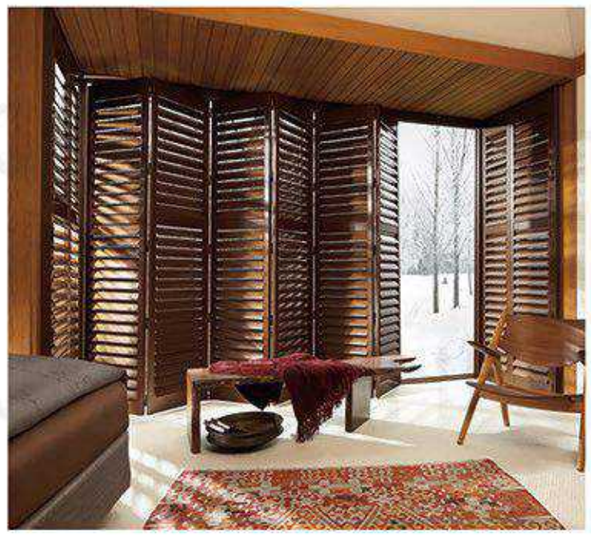

JHK-B07







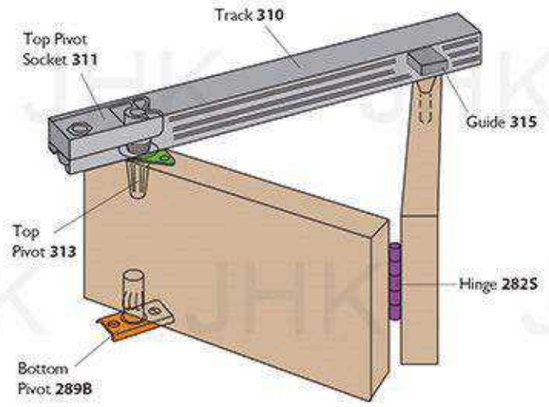

Size Range	Height:1900-2438mm(74-13/1”-96”)
	Width:305-1000mm(12”-39-3/8”)
	Thickness:25-45mm(1”-1-3/4”)
Material	White Primer/Wood Veneer + Honeycomb Paper Core
	White Primer/Wood Veneer + Particle Board Core
	White Primer/Wood Veneer + Solid Wood Core
	Solid Wood (Pine,Oak,Alder,Mahogany,Teak,etc.)
Fittings	Aluminum Straps,Louver,Glass,Mirror
Designs	Customized
Finishing Type	UV Painting,PU Painting

1. Install the top track and brackets;
2. Install the bottom brackets;
3. Install the hinges on the door;
4. Install the top and bottom pivots into the door;
5. Install the door;
6. Adjust the door.

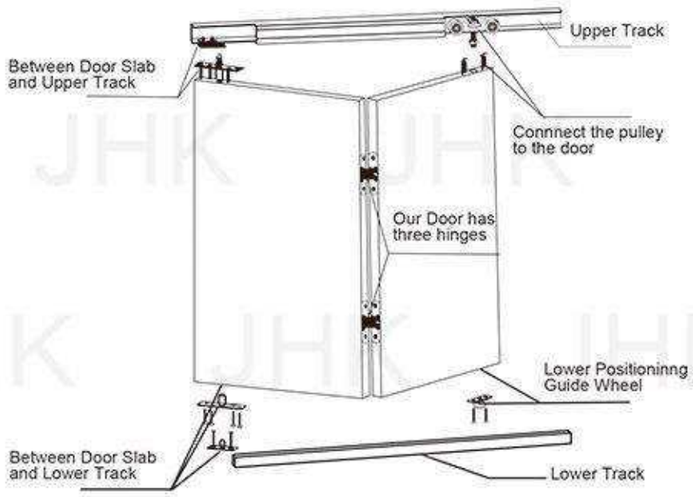

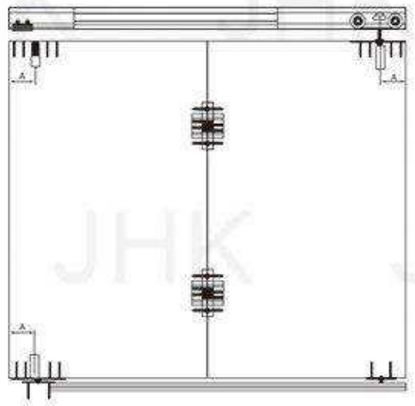

Hardware Options

JHK-AB01


Track


Bottom Bracket


Aligner Bracket


Pull


Slide Guide


Top Pivot and Guide Set


Nails


Bottom


Screws

JHK-AB02


Hinges



Hanger Wheels



Lower Guide Block


Top Shaft and Fittings


Screws&Screw Driver


Bottom Shaft and Fittings

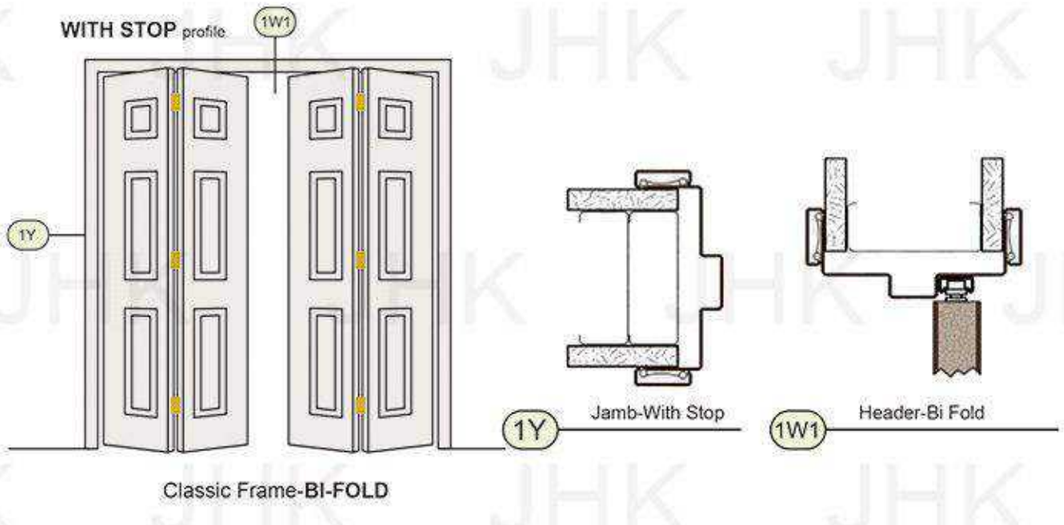
WITH STOP profile
1W1
1Y
Classic Frame-BI-FOLD
1Y
Jamb-With Stop
1W1
Header-Bi Fold

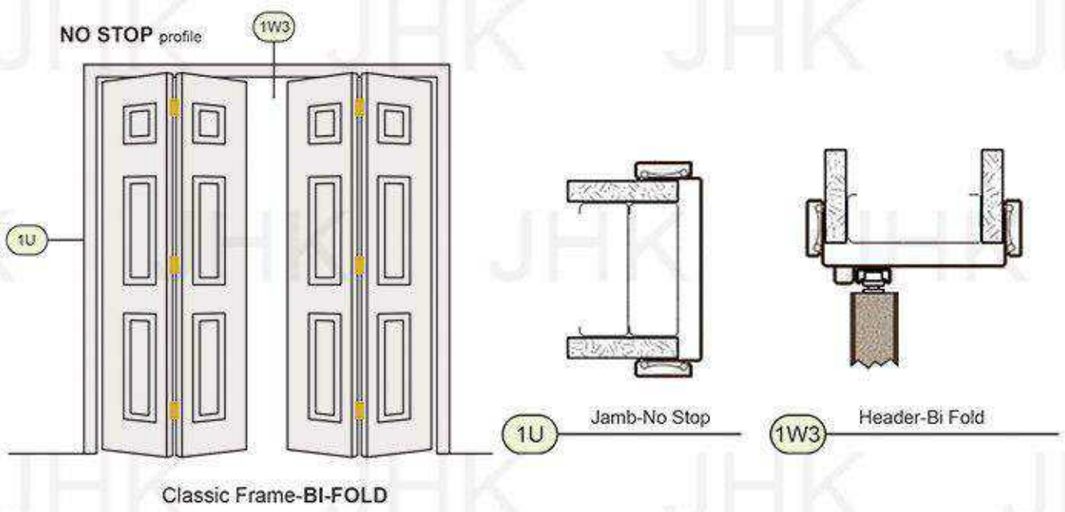
NO STOP profile
1W3
1U
Classic Frame-BI-FOLD
1U
Jamb-No Stop
1W3
Header-Bi Fold





Sliding doors can be mounted either on top of a track below or be suspended from a track above and some types 'disappear' in a wall when slide open.



Type	Sliding Door,Pocket Door,Barn Door
Size Range	Height: 1900-2438mm(74-13/16"-96")
	Width: 305-1000mm(12"-39-3/8")
	Thickness: 25-45mm(1"-1-3/4")
Material	White Primer/Wood Veneer + Honeycomb Paper Core
	White Primer/Wood Veneer + Particle Board Core
	White Primer/Wood Veneer + Solid Wood Core
	Solid Wood(Pine,Oak,Alder,Mahogany,Teak,etc.)
Fittings	Aluminum Straps,Louver,Glass,Mirror
Designs	Customized
Finishing Type	UV Painting,PU Painting



Double Sliding Door



Single Sliding Door



Bypassed Door
















Single Pocket Door




Double Pocket Door





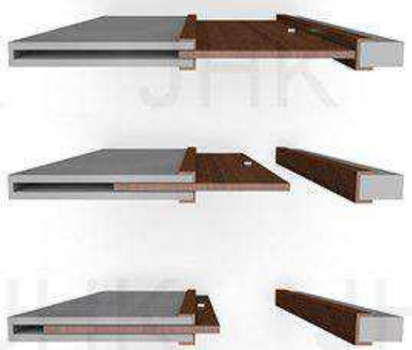

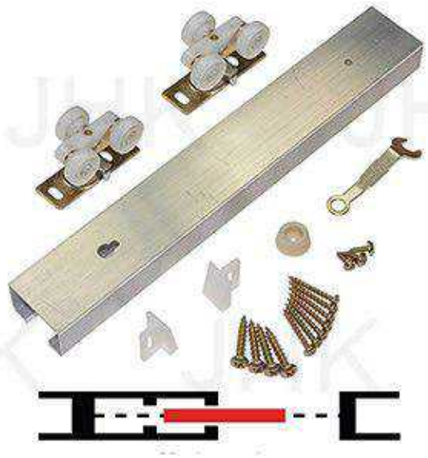



JHK-AS01

- 主要材质：深沟球轴承、锌(铝)合金、钢材、尼龙
  Main Material:Deep groove ball bearing. Zinc (Aluminum) alloy, Steel, Nylon
- 表面处理：珍珠铬
  Finish: Pearl Chrome
- 适用范围：木质移门
  Suitable Product: Wood door
- 单门承重：80kg
  Weight Capacity: 80kg S/Door
- 适装门厚：30mm-50mm
  Door Thickness : 30mm-50mm
- 包装规格：吸塑装、24付/箱
  Packing : Blister Packaging; 24 Sets/Carton


吊轨(H-002)


防脱件


下导轮(D-X06)

JHK-AS02

- 主要材质：深沟球轴承、锌(铝)合金、钢材、尼龙
  Main Material:Deep groove ball bearing. Zinc (Aluminum) alloy, Steel, Nylon
- 表面处理：珍珠铬
  Finish: Pearl Chrome
- 适用范围：木质移门
  Suitable Product: Wood door
- 单门承重：120kg
  Weight Capacity: 120kg S/Door
- 适装门厚：30mm-50mm
  Door Thickness : 30mm-50mm
- 包装规格：吸塑装、32付/箱
  Packing : Blister Packaging; 32 Sets/Carton




吊轨(H-002)


防脱件


下导轮(D-X06)





BARN DOOR HARDWARE

- Rustic and modern applications
- Easy install
- For use with solid core doors only



SIRAIGHT STRAP
Matte Black



TOP OF DOOR STRAP
Stainless Steel


FINISH OPTIONS

Matte Black

Stainless Steel

Barn Door



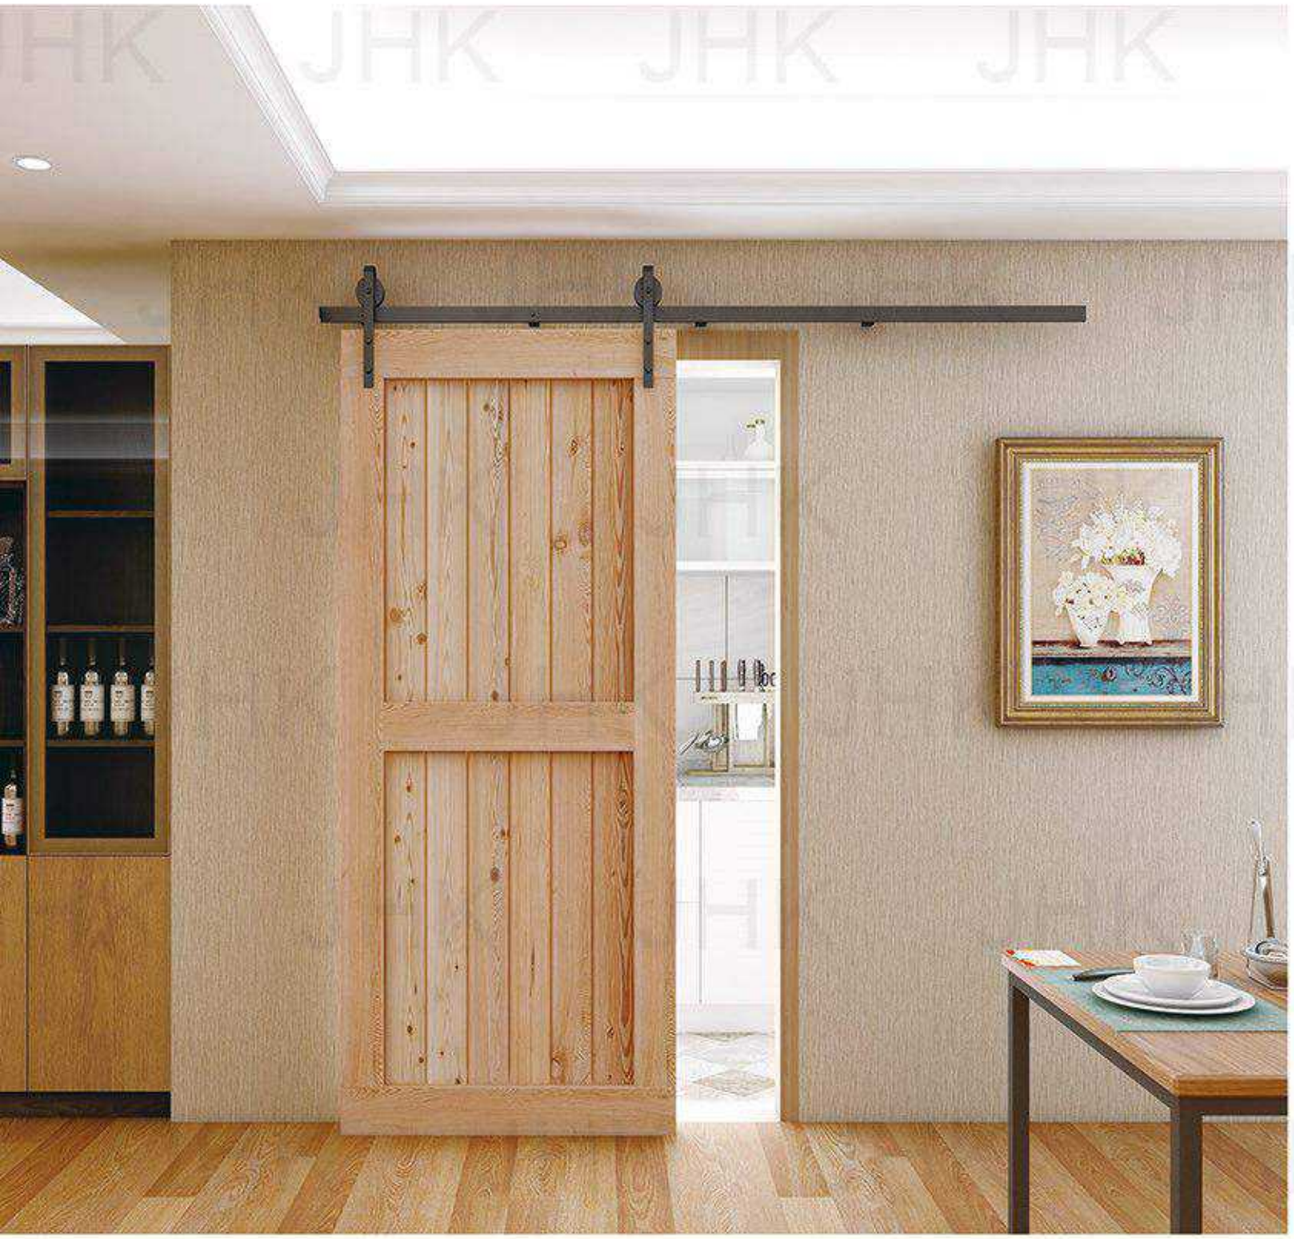



JHK-SK01G



JHK-SK02G



JHK-SK05-1



JHK-SK06





JHK-SK03-2



JHK-SK07-2



JHK-SK07-1



JHK-SK04-1

Hardware option





JHK-AB01



Barn Door Hardware







JHK-AB02









JHK-AB03







JHK-AB04



Pallet Package

Pallet Basetray Quality: 18kg
Material: Fumigation-free Plywood
Suitable Doors: White Primer Door, Veneer Door



Carton Pallet Package

Pallet Basetray Quality: 18kg
Material: Fumigation-free Plywood,3 Layers Carton
Suitable Doors: White Primer Door, Veneer Door,
PVC Door, Melamine Door



Prehung Door

Pallet Basetray Quality: 20kg
Material: Fumigation-free Plywood
Suitable Doors: Prehung Door




Bulk


Material: Corner Protection , Plastic bag
Suitable Doors: White Primer Door, Veneer Door
Advantage: Make full use of the container space





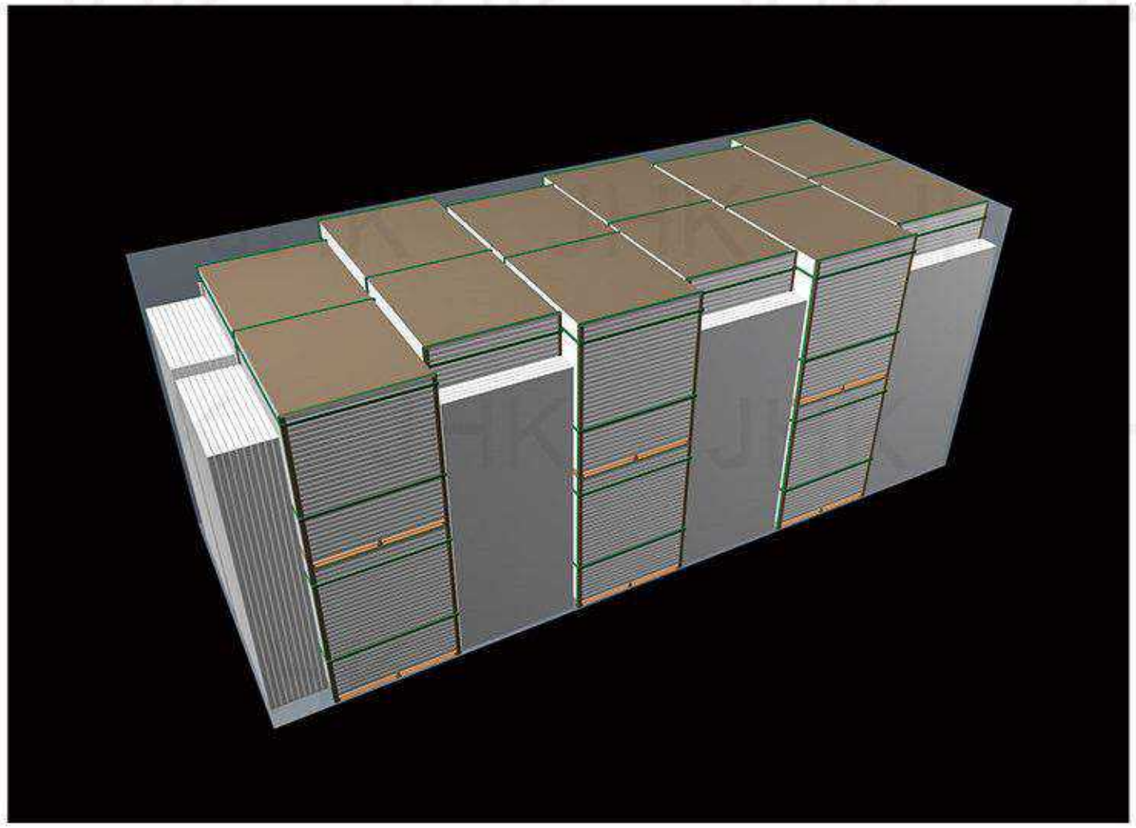


Jamb




Material Options:	1.MDF	2.Solid Wood	3.MDF+Plywood	4.MDF+Solid Wood


Casing & Architrave




Material Options:	1.MDF	2.Solid Wood	3.MDF+Plywood

How to select



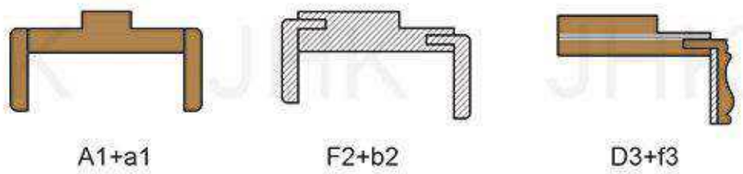

A1+a1　　F2+b2　　D3+f3

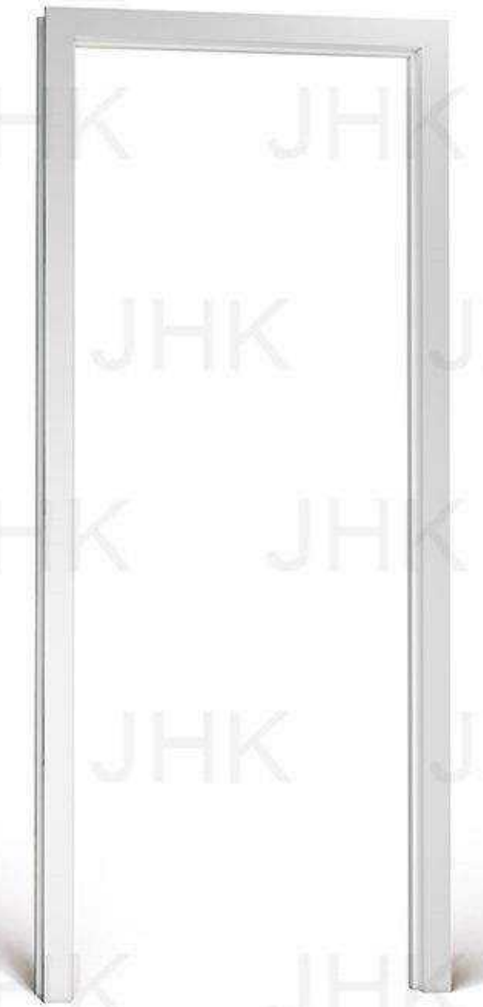



局部细节
Detail



套板
Jamb



JHK-AH01

4"x3"x 3mmx2BB SS
不锈钢子母合页 Stainless Single Side Spring Butt Hinge

表面处理:
不锈钢拉丝/青古铜/红古铜/
主要材质:
不锈钢
适用范围:
各种木质大门、房门

Finish:
SS/AB/AC
Material:
Stainless Steel
Available For:
All Kinds Of Wooden Gate Door,Room Door





JHK-AH02 NO BEARING

3"x2.5"x2.5mm
3"x3"mm
三孔圆角合页 rounded hinges

表面处理:
不锈钢拉丝/黄古铜/哑黑/青古铜/镍拉丝
主要材质:
不锈钢/铁
适用范围:
各种木制大门、房门

Finish:
SS/COF/AC/BL/SN
Material:
Stainless Steel/Steel
Available For:
All kinds Of Wooden Gate Door, Room Door



COF AB BL



WITH BEARING



JHK-AH03 NO BEARING

4"x3"x3mm
4"x4mm
三孔圆角合页 rounded hinges

表面处理:
不锈钢拉丝/黄古铜/哑黑/青古铜/镍拉丝
主要材质:
不锈钢/铁
适用范围:
各种木制大门、房门

Finish:
SS/COF/AC/BL/SN
Material:
Stainless Steel/Steel
Available For:
All kinds Of Wooden Gate Door, Room Door



COF AB BL



WITH BEARING









JHK-AH03

材料

内芯： 不锈钢

外壳： 不锈钢/锌合金

表面处理： 镍拉丝/青古铜/锆金/亮铬

尺寸： 28X118X22mm

Material

Inner core: Stainless steel


Shell: Stainless steel/Zinc alloy

Finish:SN/AB/PVD/CP

Size:28X118X22mm



JHK-AH04




4"x3"
4"x4"
不锈钢单面弹簧铰

表面处理：
不锈钢拉丝/精抛光/青古铜/红古铜/锆金
主要材质：
不锈钢
适用范围：
各种木质大门、房门
Finish:
SS/PSS/AB/AC/PVD
Material:
Stainless Steel
Available For:
All Kinds Of Wooden Gate Door, Room Door



JHK-AH05



4"x2 SS
不锈钢双面弹簧铰

表面处理：
不锈钢拉丝/精抛光/青古铜/红古铜/锆金
主要材质：
不锈钢
适用范围：
各种木质大门、房门
Finish:
SS/PSS/AB/AC/PVD
Material:
Stainless Steel
Available For:
All Kinds Of Wooden Gate Door, Room Door



JHK-AH06



C型多功能液压合页 OX
规格：155X97

表面处理：
砂白/砂金/青古/红古/亚黑
主要材质：
铝合金
适用范围：
各种木质大门、房门
Finish:
OX/SG/AB/AC/BL
Material:
Aluminum alloy
Available For:
All Kinds Of Wooden Gate Door, Room Door







JHK-AL01-1



JHK-AL01-2



JHK-AL01-3



JHK-AL02-1



JHK-AL02-2



JHK-AL02-3



JHK-AL03-1

- 表面处理：拉丝 Finish:SN
- 材质：锌合金/不锈钢 Material: Zinc alloy/stainless steel
- 适装门厚：30-50mm Door Thickness :30-50mm
- 安装中心距：60-70mm Center distance :60-70mm
- 适用范围：木门、金属门 Available For: wooden doors metal door



JHK-AL03-2

- 表面处理：拉丝 Finish:SN
- 材质：锌合金/不锈钢 Material: Zinc alloy/stainless steel
- 适装门厚：30-50mm Door Thickness :30-50mm
- 安装中心距：60-70mm Center distance :60-70mm
- 适用范围：木门、金属门 Available For: wooden doors metal door



JHK-AL03-3

- 表面处理：拉丝 Finish:SN
- 材质：锌合金/不锈钢 Material: Zinc alloy/stainless steel
- 适装门厚：30-50mm Door Thickness :30-50mm
- 安装中心距：60-70mm Center distance :60-70mm
- 适用范围：木门、金属门 Available For: wooden doors metal door



JHK-AL04

- 表面处理：拉丝 Finish:SN
- 材质：锌合金/不锈钢 Material: Zinc alloy/stainless steel
- 适装门厚：30-50mm Door Thickness :30-50mm
- 安装中心距：60-70mm Center distance :60-70mm
- 适用范围：木门、金属门 Available For: wooden doors metal door



JHK-AL05

- 表面处理：亮铬 Finish:CP
- 材质：锌合金 Material: Zinc alloy
- 锁芯：玻璃纤维增强尼龙材质，静音型
- 安装中心距：38-45mm，可定制55mm



JHK-AL06

- 表面处理：亚黑 Finish:BL
- 材质：锌合金 Material:Zinc Alloy
- 适用门厚：38-50mm Door Thickness:38-50mm
- 适配锁体：8550/7255 Lock body:8550/7255
- 适用范围：户外门、大门、别墅门、房门 Available For: Doors Inside And Outside The House And Gate
- 适用标准：QB/T2474-2000 GB21556-2008 Applicable Standard:QB/T2474-2000 GB21556-2008



JHK-AL07-1 JHK-AL07-2



JHK-AL08

- 表面处理：镍拉丝 Finish:SN
- 材质：锌合金 Material:Zinc Alloy
- 适用门厚：38-50mm Door Thickness:38-50mm
- 适配锁体：8550/7255 Lock body:8550/7255
- 适用范围：户外门、大门、别墅门、房门 Available For: Doors Inside And Outside The House And Gate
- 适用标准：QB/T2474-2000 GB21556-2008 Applicable Standard:QB/T2474-2000 GB21556-2008



JHK-AL09

- 表面处理：镍拉丝 Finish:SN
- 材质：锌合金 Material:Zinc Alloy
- 适用门厚：38-50mm Door Thickness:38-50mm
- 适配锁体：8550/7255 Lock body:8550/7255
- 适用范围：户外门、大门、别墅门、房门 Available For: Doors Inside And Outside The House And Gate
- 适用标准：QB/T2474-2000 GB21556-2008 Applicable Standard:QB/T2474-2000 GB21556-2008



JHK-AL10



JHK-AL11

表面处理：黄古铜
Finish:SN
材质：锌合金
Material:Zinc Alloy
适用门厚：38-50mm
Door Thickness:38-50mm
选配锁体：8550/7255
Lock body:8550/7255
适用范围：户外门、大门、别墅门、房门
Available For: Doors Inside And Outside The House And Gate
适用标准：QB/T2474-2000 GB21556-2008
Applicable Standard:QB/T2474-2000 GB21556-2008



JHK-AL12

表面处理：铝氧化砂白
Finish:OX
材质：氧化铝
Material:Aluminum Alloy
选配锁体：5845
Lock body:5845



JHK-AL13

表面处理：铝氧化砂白
Finish:OX
材质：氧化铝
Material:Aluminum Alloy
选配锁体：5845
Lock body:5845



JHK-AL14

表面处理：铝氧化砂白
Finish:OX
材质：氧化铝
Material:Aluminum Alloy
选配锁体：5845
Lock body:5845



JHK-AL15

表面处理：铝氧化亚黑
Finish:BL
材质：氧化铝
Material:Aluminum Alloy
选配锁体：5845
Lock body:5845



JHK-AL16

表面处理：铝氧化亚黑
Finish:BL
材质：氧化铝
Material:Aluminum Alloy
选配锁体：5845
Lock body:5845



JHK-AL17

表面处理：铝氧化亚黑
Finish:BL
材质：氧化铝
Material:Aluminum Alloy
选配锁体：5845
Lock body:5845



JHK-AO01



JHK-AL18

表面处理：青古铜
Finish:DAB
材质：锌合金
Material:Zinc Alloy
适用门厚：38-50mm
Door Thickness:38-50mm
选配锁体：8550
Install the door so from:8550
适用范围：户外门、大门、别墅门
Available For: Doors Inside And Outside The House And Gate
适用标准：QB/T2474-2000 GB21556-2008
Applicable Standard:QB/T2474-2000 GB21556-2008

可选表面处理 Optinal Finish:

COF 黄古铜　PVD 铬金　DAB 青古铜
DAC 红古铜　BN/RGP 黑镍/真金

选配锁体：8531-50





JHK-AL19

表面处理：黑红古铜
Finish:DRG
材质：锌合金
Material:Zinc Alloy
适用门厚：38-50mm
Door Thickness:38-50mm
选配锁体：8550
Install the door so from:8550
适用标准：QB/T2474-2000 GB21556-2008
Applicable Standard:QB/T2474-2000 GB21556-2008

选配锁体：8531-50



8542-532 COF



JHK-AL20

表面处理：黄古铜
Finish:COF
材质：锌合金
Material:Zinc Alloy
适用门厚：38-50mm
Door Thickness:38-50mm
选配锁体：5845
Lock body:5845
适用标准：QB/T2474-2000 GB21556-2008
Applicable Standard:QB/T2474-2000 GB21556-2008



JHK-AL21

表面处理：黄古铜
Finish:CDF
材质：锌合金
Material:Zinc Alloy
适用门厚：38-50mm
Door Thickness:38-50mm
选配锁体：5845
Lock body:5845
适用标准：QB/T2474-2000 GB21556-2008
Applicable Standard:QB/T2474-2000 GB21556-2008







JHK-AL22

表面处理：镍拉丝/亮镍
Finish:SN/NP
材质：锌合金
Material:Zinc Alloy
选配锁体：7560
Install the door so from:7560



JHK-AL23

表面处理：黄古铜
Finish:CDF
材质：锌合金
Material:Zinc Alloy
选配锁体：6860
Install the door so from:6860



JHK-AO02

表面处理：镀拉丝、青古铜
主要材质：锌合金
Finish：SN、AB
Material：Zinc Alloy



JHK-AO03

表面处理：镀拉丝、青古铜
主要材质：锌合金
Finish：SN、AB
Material：Zinc Alloy



D3811 SN



D3811 BL



D3811 PVD

JHK-AO04

表面处理：
镀拉丝、亚黑、钛金
主要材质：
锌合金
Finish：
SN、BL、PVD
Material：
Zinc Alloy



JHK-AO05

表面处理：
不锈钢拉丝
主要材质：
不锈钢
Finish：
SS
Material：
Stainless Steel



JHK-AO06

表面处理：不锈钢拉丝、精抛光、
主要材质：不锈钢
Finish: SS、PSS
Material: Stainless Steel
Diameter:Φ8mm/Φ10mm/Φ12mm



JHK-AO07

规格/SIZE：（MM）

A:600	B:400	C:Φ38
A:800	B:600	C:Φ38
A:1000	B:700	C:Φ38
A:1200	B:900	C:Φ38
A:1500	B:1100	C:Φ38
A:1800	B:1400	C:Φ38

材　质：不锈钢
Material: Stainless Steel
表面处理：不锈钢拉丝 精抛光
Finish: SS PSS



JHK-AO08

表面处理：不锈钢拉丝、精抛光、
主要材质：不锈钢
Finish: SS、PSS
Material: Stainless Steel



JHK-AO09

表面处理：不锈钢拉丝、精抛光、
主要材质：不锈钢
Finish: SS、PSS
Material: Stainless Steel



JHK-AO10

表面处理：不锈钢拉丝、精抛光、
主要材质：不锈钢
Finish: SS、PSS
Material: Stainless Steel



JHK-AO11

表面处理：不锈钢拉丝、精抛光、
亚光青古铜、钛金
主要材质：不锈钢304/316
Finish: SS、PSS、DAB、PVD
Material: Stainless Steel 304/ 316



JHK-AO12

表面处理：不锈钢拉丝、精抛光、
亚光青古铜、钛金
主要材质：不锈钢304/316
Finish: SS、PSS、DAB、PVD
Material: Stainless Steel 304/ 316



JHK-AO13

表面处理：不锈钢拉丝、精抛光、
亚光青古铜、钛金
主要材质：不锈钢304/316
Finish: SS、PSS、DAB、PVD
Material: Stainless Steel 304/ 316

Invisible Door Closer



JHK-AC01



JHK-AC02

Visible Door Closer



JHK-AC03



JHK-AC04

JHK
基恒康

CLEVER JOURNEY
FOR YOUR DREAM
A JOURNEY ACROSS THE WONDERFUL HEART

OPEN THE DOOR OF YOUR DREAM

A JOURNEY ACROSS THE WONDERFUL HEART